

GRABER. | DELIGHT IN
EVERY DETAIL

Graber Wood/Faux
Wood Blinds

US Price Guide

May 2026

TRADITIONS® WOOD, ELITE WOOD, COMPOSITE, AND LAKE FOREST® FAUX WOOD BLINDS

Product Information Guide

Features

The Graber® Wood Story	3
Graber Wood Characteristics	3
Traditions Wood Blinds	4
Elite Wood Blinds	4
Elite Wood Blinds—Authentic Hardwoods	4
Traditions Composite Blinds	4
Lake Forest Premium Faux Wood and Faux Wood Blinds	4

Size Considerations

Cordless Lift, Depth Requirements for Inside Mount	5
--	---

Options

Blind Options	6
Cordless Lift	7
Control Lengths for Wands	7
Multiple Blinds on One Headrail	8
Accent Color	9
Custom Color	9
Why Elite Wood for Your Client's Home	9
How to Order Elite Wood: Special Ordering Instructions	9
Valance Options	10–11
How to Measure for Valance Returns	12
How to Measure and Order Valances	12
Valance Keystones	13
Splicing Requirements	13
How to Measure a Special Splice Location	13
Bay and Corner Windows	14

PLEASE NOTE:

Photos and illustrations are for inspiration only.
Not all product configurations are available in all countries.

Window blind cords are a strangulation hazard for young children. Consult your dealer or store associate for cordless products, or products with inaccessible cords. Remove this product immediately if a cord longer than 22 cm, or a loop exceeding 44 cm, becomes accessible.

VEUILLEZ NOTER :

Les photos et les illustrations ne sont offertes qu'à titre d'inspiration. Toutes les configurations de produits ne sont pas disponibles dans tous les pays.

Les cordons pour store de fenêtre représentent un risque d'étranglement pour les jeunes enfants. Consultez votre dépositaire ou un associé de magasin pour des produits sans cordon ou des produits dont les cordons ne sont pas accessibles.

Retirez ce produit immédiatement si un cordon mesurant plus de 22 cm de longueur ou une boucle dépassant 44 cm deviennent accessibles.

GRABER®

MAY 2026

(05/26) 26-759400

Options (continued)

Wood Specialty Shapes: Incline Wire Blinds	15
Cut-Outs	16
Wood Specialty Shapes: Angle Top or Bottom	17
Wood Specialty Shapes: Trapezoid, Triangle, and Octagon	18
Wood Specialty Shapes: Arched Blinds	19
Wood Specialty Shapes: Ovals and Circles	20
Making a Template for Specialty Blinds	21
Using the Graber Template Service	21

General Information

Slat Count Table: 2" Wood Blinds	22
Slat Count Table: 2 $\frac{3}{8}$ " Wood Blinds	23
Slat Count Table: 2" Composite Blinds	24
Slat Count Table: 2" Premium Faux Wood and Faux Wood Blinds	25
Slat Count Table: 2 $\frac{1}{2}$ " Premium Faux Wood and Faux Wood Blinds	26
Slat Route and Ladder Count Charts: Traditions® 2" and 2 $\frac{3}{8}$ " Wood Blinds	27
Slat Route and Ladder Count Charts: 2" and 2 $\frac{3}{8}$ " Elite Wood Blinds	27
Slat Route and Ladder Count Charts: Traditions 2" Composite Blinds	28
Slat Route and Ladder Count Charts: Lake Forest 2" and 2 $\frac{1}{2}$ " Premium Faux Wood and Faux Wood Blinds with Cordless Lift	28
Cordless Lift Blinds Product Detail: 2" and 2 $\frac{1}{2}$ " Premium Faux Wood and Faux Wood	29
Cordless Lift Blinds Product Detail: 2" and 2 $\frac{3}{8}$ " Wood, 2" Composite	30

Features

The Graber® Wood Story

Quality of Wood Defines a Blind's Quality

We use only 100% North American hardwood in the construction of our wood blinds because of its light weight, consistent color, hardness, structural stability, and attractive grain.

Sound Forestry Techniques

We work only with foresters who practice “sustained yield forest management”—nearly twice as much hardwood grows as is harvested in the U.S. each year. The volume of hardwoods in American forests today is greater than it was 50 years ago.

Preserving Our Natural Resources

Our Springs Window Fashions (SWF) wood products facility consumes recycled sawdust and wood shavings, generating the heat required to dry lumber for a completely self-sufficient manufacturing process. Our Reynosa, Mexico fabrication and finishing facility is 99.7% pollution free, above any U.S. standard.

SWF Wood Products, Grayling, Michigan

We have control over the quality of wood used—we control the process from green lumber to finished blinds. Hardwoods used in crafting Graber Wood Blinds are kiln dried and molded at our SWF wood products facility in Grayling, Michigan. The wood is dried slowly to strict wood blind specifications because structural change can occur when moisture is removed. Molding and sanding operations provide the highest quality surface, free of defects.

Springs Window Fashions, Reynosa, Mexico

At our state-of-the-art finishing plant in Reynosa, Mexico, components are carefully sorted prior to fabrication for color uniformity and wood characteristics. We sort wood as an end user, rather than a finishing vendor, taking out defects in a climate-controlled building. To finish the blind, we use only high quality paints and stains; on-site certified color technicians provide both application and quality control.

What Makes Graber Traditions® Blinds Different from the Rest?

- Painted and stained wood blinds are made from 100% North American hardwoods, the premier wood used in the construction of blinds
- SWF wood products and finishing facilities provide state-of-the-art technologies and processes
- Expanded choice of finishes with PureGrain™ Finish—vibrant stains that showcase the natural grain of the wood
- Unique valance choices, specialty shapes, and more
- Traditions composite blinds have superior strength and moisture resistance
- The best customer service team in the industry—trained to answer any question about Graber Traditions Blinds
- Limited lifetime warranty

Graber Wood Characteristics


Wood used to manufacture Graber Wood Blinds has many natural characteristics that make it truly unique. The following are all natural characteristics of wood, and we do not consider them to be defects:

- Grain—The direction, size, and appearance of wood fibers vary greatly depending on where the wood is cut from within the tree
- Tiger Striping—Occurs when a tree develops wavy grain, due to genetics, soil content, or other natural scenarios
- Burl—Formed from an irregular growth on the outer edge of the tree
- Bird's Eye—Small area on the surface of the board where fibers are contorted to form circular figures that resemble birds' eyes
- Pin Knots—Vary in size, shape, structure, and color
- Mineral Marks—Dark or discolored areas caused by minerals which the tree extracts from the water or soil; can be either a streak or a stain, usually blackish blue
- Knotty Pine/Rustic—Material contains markings that are more extreme than in standard products; the number and degree of marking will vary throughout the blind

Please be assured that these markings in no way affect the durability or the structural integrity of the blind.

Natural variations in color and grain are inherent in the beauty of wood. These variations are within established industry guidelines and should be expected. In addition, blinds may stain slightly darker or lighter than the swatches shown in the sampling.

NOTE: Elite Walnut, Maple, and Cherry will have the unique natural variations of these beautiful hardwoods—these variations are to be expected. Blinds made from these materials will undergo a degree of color change over time, further enhancing the beauty of the wood.

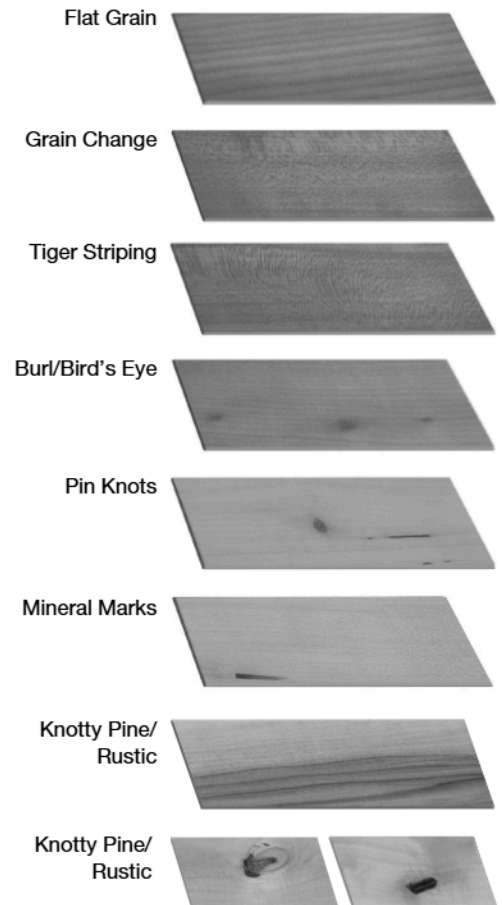

Features

Traditions® Wood Blinds

- Stained and painted blinds crafted from North American hardwoods
- Finish highlights the natural characteristics of wood
- 2" and 2½" slat sizes available
- Easy grip bottomrail for superior closure; makes lifting and lowering cordless lift blinds easier

Elite Wood Blinds

- Available in all Graber® wood paints and stains
- 2" and 2½" slat sizes available
- Sandblast finish available on any 2" paint or stain
- Custom color available; not available in unique finishes
- Easy grip bottomrail for superior closure; makes lifting and lowering cordless lift blinds easier
- Specialty shapes
- Accent valance and bottomrail: complement the window and décor of the room by specifying a different color valance and bottomrail

Elite Wood Blinds—Authentic Hardwoods

- 2" wood blinds made from premier North American hardwoods—Walnut, Maple, and Cherry with a clear coat finish that further enhances the wood's beauty
- Easy grip bottomrail for superior closure; makes lifting and lowering cordless lift blinds easier

Traditions Composite Blinds


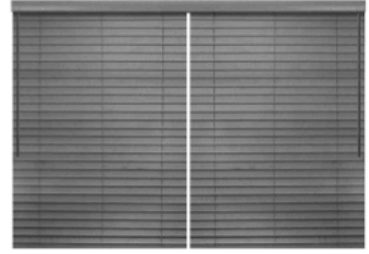
- Moisture-resistant multiple polymer composite slats
- 2" slat size available
- Trapezoid bottomrail makes lifting and lowering cordless lift blinds easier

Lake Forest® Premium Faux Wood and Faux Wood Blinds

- Solid or woodgrain moisture-resistant engineered polymer slats
- 2" and 2½" slat sizes available in both premium faux wood and faux wood
- Trapezoid bottomrail makes lifting and lowering cordless lift blinds easier

Size Considerations

Cordless Lift



									
	Cordless Lift Blinds	Cordless Lift Blinds Multiple Blinds on One Headrail							
	Width	Height	Width	Height					
Styles	Minimum (exact) (inches)	Maximum (inches)	Minimum (inches)	Maximum (inches)	Minimum Panel (exact) (inches)	Maximum Panel (inches)	Maximum Blind (inches)	Minimum Blind (inches)	Maximum Blind (inches)
Traditions® Wood Blinds									
Traditions 2" Wood Blinds	12	84	12	86	12	84	120	12	86
Traditions 2" Barnwood and Distressed Wood Blinds	12	84	12	86	12	84	120	12	86
Traditions 2½" Wood Blinds	12	84	12	86	12	84	120	12	86
Elite Wood Blinds									
Elite 2" Wood Blinds	12	84	12	86	12	84	120	12	86
Elite 2" Authentic Hardwood Blinds**	12	84	12	78	12	84	120	12	78
Elite 2½" Wood Blinds	12	84	12	86	12	84	120	12	86
Traditions Composite Blinds									
Traditions 2" Composite Blinds	12	66	12	72	12	66	120	12	72
Lake Forest® Premium Faux Wood and Faux Wood Blinds									
Lake Forest 2" Premium Faux Wood Blinds	17	96	12	96	17	96	120	12	96
Lake Forest 2" Faux Wood Blinds	17	96	12	96	17	96	120	12	96
Lake Forest 2½" Premium Faux Wood Blinds	17½	96	12	96	17½	96	120	12	96
Lake Forest 2½" Faux Wood Blinds	17½	96	12	96	17½	96	120	12	96

**Walnut maximum height 68".

NOTE: 2" and 2½" Max Blind Coverage Area= 49 sq. ft.

No lift blind option is available down to 7" (exact) min width for specific applications. Please see pricing chart for width and length specifics.

Depth Requirements for Inside Mount

			
		Partially recessed headrail in window casing/ molding	Fully recessed headrail in window casing/ molding
Blind Type	Headrail Dimensions (inches)	Minimum Depth Mount (inches)	Wand Tilt (inches)
Traditions 2" and 2½" Wood Blinds	2 x 2¼	¾	2¼
Elite 2" and 2½" Wood Blinds	2 x 2¼	¾	2¼
Traditions 2" Composite Blinds	2 x 2¼	¾	2¼
Lake Forest 2" and 2½" Premium Faux Wood and Faux Wood Blinds	1½ x 2¼	¾	2¼

*For measurements of fully recessed headrails with a valance, see valance options.

Options

Blind Options (for surcharges and pricing refer to price charts)

Blind Options	Traditions 2" Wood and 2" Elite Wood	Traditions 2¾" Wood and 2¾" Elite Wood	Traditions 2" Composite	Lake Forest® 2" Premium Faux Wood and 2" Faux Wood	Lake Forest 2½" Premium Faux Wood and 2½" Faux Wood	Details
Accent Color (valance/bottomrail)	● [^]	● [^]				See the "Accent Color" section
Bay and Corner Windows	●	●	●	●	●	See the "Options" section for measuring and ordering information
Wand Tilt Locations:						
• Tilt Left	●	●	●	●	●	Must be requested at time of order
• Tilt Right	●	●	●	●	●	
Custom Color	● [^]	● [^]				See price charts
Cut-Outs ¹	●	●	●	●	●	Maximum width for cut-out is 1" before route hole
Hold Down Brackets	●	●	●	●	●	Must be requested at time of order
Multiple Blinds on One Headrail: 2 or 3 on 1 to left of solid line*	● [§]	● [§]	● [§]	● [§]	● [§]	See the "Options" section
Projection Brackets						
• 2¾" and 4¾" Projection Brackets	●	●	●	●	●	Projection brackets not available for inside mount; must be requested at time of order; shims are standard on 2¾" and 2½" blinds (outside mount)
• ¾" Shims	●	●	●	●	●	
• Ring Tilt				●	●	Available control option
Sky Pole ¹						
• 6 foot pole				● [§]	● [§]	Available with ring tilt only; must be requested at time of order
• 9 foot pole						
Wood Cornices	● [§]	● [§]	● [§]	● [§]	● [§]	See cornices and valances product information guide
Wood Valances: Additional Designs			● [§]	● [§]	● [§]	See cornices and valances product information guide

¹Not available with cordless

*See solid line on appropriate price grid.

§Option available with surcharge.

^Available with Elite wood only.

Options

Cordless Lift



- Available on wood, composite, and faux wood blinds
- Cordless lift blinds offer a safer alternative for homes with children and pets
- Easy to use: to lower blind, pull down; to raise, simply guide the blind into the desired location by gently lifting the bottomrail
- Legacy, Craftsman, or Symphony valances recommended with wood cordless lift blinds for better headrail coverage

	Wood	Composite	Faux Wood
Minimum Width (inches)	12	12	17
Maximum Single Blind Width (inches)	84	66	96
Maximum Multiple Blinds on One Headrail (inches)	120	120	120
Minimum Height (inches)	12	12	12
Maximum Height (inches)	86	72	96

*78" for authentic hardwood Cherry and Maple, 68" for Walnut.

Control Lengths for Wands

Finished Blind Height (inches)	Wand Length* (inches)
up to 36	12
36 ¹ / ₈ to 60	20
60 ¹ / ₈ to 70	30
70 ¹ / ₈ to 80	40
80 ¹ / ₈ to 90	48
86 ¹ / ₈ to 96	60*

*Wands over 48" long are a clear plastic and are only available with Cordless 2" and 2¹/₂" Faux Wood and No Lift /Tilt Only blinds.

NOTE: Special length wands may be requested at the time of ordering.

Options

Multiple Blinds on One Headrail



Gap 1/4"

- **Surcharge:** blinds to the left of the solid line on the price charts
- **No charge:** blinds to the right of the solid line on the price charts
- Two or more blinds can be installed on a single headrail to provide a practical treatment for larger windows or sliding patio doors
- Due to weight limitations, some blinds must be manufactured as two or three blinds on one headrail

Cordless Lift

Multiple Blinds	Control Cord Locations	Gap (inches)
Two-On-One Headrail	Left panel (tilt left) Right panel (tilt right)	1/4
Three-On-One Headrail	Left panel (tilt left) Right panel (tilt right) Center panel (tilt left)	1/4

NOTE: Optional control locations may be requested.

Measuring

1. Measure overall width of the area to be covered. If space permits, an overlap of 1 1/2" per side is recommended for outside mounts.
2. Measure the width of the area each blind is to cover. Measure and specify the left blind first, continuing to the right. Allow a minimum of 1/4" between blinds for operating clearance.
3. Total width of all blinds, plus clearance(s), must equal overall width.
4. Measure height as follows:
 - a. For windows, use standard inside or outside measuring procedures.
 - b. For patio doors, measure height within 3/4" of floor, either from ceiling or a point at least 6 1/2" above the door frame. Check slat count table to see if blind will completely clear the doorway.

Ordering

1. Indicate whether two or three blinds are to be mounted on one headrail.
2. Specify total width of headrail.
3. Indicate each panel width separately, specify left blind first, continuing to the right.
4. Specify control positions.
5. Add appropriate surcharge, if to the left of the solid line on the price chart.

Options

Accent Color (Elite Wood Blinds only)

For surcharge, see price charts.

Complement the window and décor of the room by specifying a different color valance and bottomrail. Single color only.

Custom Color

For surcharge, see price charts.

Graber® offers the unique option of custom color either paint or stain. Use the following guidelines when placing your order:

1. Complete the custom color match request form. Forms can be found on graberdirect.com.
2. Supply Springs Window Fashions with a color sample labeled with the color name and purchase order number. The sample needs to be at least 2" x 2". For best results, submit a 3" x 3" color sample.
3. Send the order, along with the request form and color sample to: Please send all color chips to:
Springs Window Fashions, LLC
Attention: Custom Color
8467 Route 405 Hwy South
P.O. Box 500
Montgomery, PA 17752
4. Approval of the custom color sample is required on orders of six or more blinds. A sample of the custom color will be sent upon request for orders of less than six blinds. If a custom color sample is not requested, the sample provided will be used to manufacture the wood blinds. If the color sample is to be returned, please note this on your order.
5. Custom color samples will be sent for approval approximately two weeks after receiving the original color sample.
6. Once approval is received, fabrication of the custom color blinds will begin.

Why Elite Wood for Your Client's Home

Elite wood blinds are individually hand finished using a wiping technique to enhance the beauty of the wood and create a truly beautiful blind as unique as your client.

Additional benefits of Elite wood blinds include:

- Each wood component is finished after being cut and routed for the client's individual blind—creating wood components that are completely sealed from the environment
- Elite wood finish is applied using a wiping process rather than flow coating the finish; the end result is a finish that further enhances the beautiful characteristics of the wood
- All Graber Traditions® paints and stains are available using this unique finishing style, or create a completely customized blind using the custom color option

How to Order Elite Wood: Special Ordering Instructions




On graberdirect.com

- Select the description Elite wood
- Select the finish choice
 - Elite finish
 - Elite high gloss
 - Sandblast finish (2" only)
- Follow the remaining ordering instructions to complete the order

NOTE: Due to the nature of the Elite process, blinds and specialty shapes require an extended lead time. Lead times vary depending on blind sizes and quantities.

Options

Valance Options

Valance Type	Blind Type	Maximum Continuous Width*		Control Type	Standard Valance Returns (inches)	Full Recess Depth (inches)
		Inside Mount No Returns (inches)	Inside Mount with Returns (inches)			
2½" Classic Valance  Valance Returns ½" to 1": glued 1⅛" to 4¾": optional glued 4⅞" and greater: not glued	2" Barnwood^	100%	98%	Wand tilt	3⅞	3⅞
				Cordless wand tilt		
3" Classic Valance  Valance Returns ½" to 1": glued 1⅛" to 4¾": optional glued 4⅞" and greater: not glued	2" Wood 2" Elite Wood	100%	98%	Wand tilt	3⅞	3⅞
	2⅝" Wood 2⅝" Elite Wood	100%	98%	Cordless wand tilt	3⅞	3⅞
	2" Composite^	106%	105%	Wand tilt	3⅞	3⅞
	2" Premium Faux Wood^ 2" Faux Wood^	106%	105%	Cordless wand tilt	3⅞	3⅞
	2½" Premium Faux Wood^ 2½" Faux Wood^	106%	105%	Wand tilt	3⅞	3⅞
3" Majestic Valance  Valance Returns ½" to 1": glued 1⅛" to 4¾": optional glued 4⅞" and greater: not glued	2" Composite^	106%	105%	Wand tilt	3⅞	4⅞
	2" Premium Faux Wood^ 2" Faux Wood^	106%	105%	Cordless wand tilt	3⅞	4⅞
	2½" Premium Faux Wood^ 2½" Faux Wood^	106%	105%	Wand tilt	3⅞	4⅞
				Cordless wand tilt	3⅞	4⅞






*Continuous valances wider than sizes shown above will have two or more sections spliced together with a keystone. Maximum width for spliced valances is 300¾".

^Keystones not available.

NOTE: For replacement valances see cornices and valances product information guide.

Options

Valance Options

Valance Type	Blind Type	Maximum Continuous Width*		Control Type	Standard Valance Returns (inches)	Full Recess Depth (inches)
		Inside Mount No Returns (inches)	Inside Mount with Returns (inches)			
3½" Craftsman Valance  Valance Returns ½" to 1": glued 1⅛" to 4⅜": optional glued 4⅞" and greater: not glued	2" Wood 2" Elite Wood	100¼	98⅝	Wand tilt Cordless wand tilt	3⅞	3⅝
	2⅝" Wood 2⅞" Elite Wood	100¼	98⅝	Wand tilt Cordless wand tilt	3¼	4⅞
3½" Legacy Valance  Valance Returns ½" to 1": glued 1⅛" to 4⅜": optional glued 4⅞" and greater: not glued	2" Wood 2" Elite Wood	100¼	98⅝	Wand tilt Cordless wand tilt	3⅞	4
	2" Distressed Wood^ 2" Elite Authentic Hardwood^	100¼	98⅝	Wand tilt Cordless wand tilt	3⅞	4
	2⅝" Wood 2⅞" Elite Wood	100¼	98⅝	Wand tilt Cordless wand tilt	3¼	4⅞
4½" Symphony Valance  Valance Returns ½" to 1": glued 1⅛" to 4⅜": optional glued 4⅞" and greater: not glued	2" Wood 2" Elite Wood	100¼	98⅝	Wand tilt Cordless wand tilt	3⅞	4⅞
	2⅝" Wood 2⅞" Elite Wood	100¼	98⅝	Wand tilt Cordless wand tilt	3¼	4½
5½" Craftsman Valance  Valance Returns ½" to 4⅜": glued 4⅞" and greater: not glued	2" Wood 2" Elite Wood	100¼	98⅝	Wand tilt Cordless wand tilt	3⅞	3⅝
	2⅝" Wood 2⅞" Elite Wood	100¼	98⅝	Wand tilt Cordless wand tilt	3¼	4⅞
5" Flat Valance 	2" Wood Specialty Shapes	N/A	N/A	Wand tilt	N/A	3⅝
	2⅝" Wood Specialty Shapes	N/A	N/A	Wand tilt	N/A	3⅝

*Continuous valances wider than sizes shown above will have two or more sections spliced together with a keystone.

Maximum width for spliced valances is 300¾".

^Keystones not available.

NOTE: For replacement valances see cornices and valances product information guide.

Options

How to Measure for Valance Returns

Window depths vary considerably depending on the age and style of the window. **Always** measure the window depth, regardless of the type of window treatment the client is considering. Knowing the depth when the order is placed can help prevent costly errors.


Please use our valance return cards to assist in correctly calculating valance return sizes.

To calculate the return width, use this formula:

(standard return width) minus (client window depth) = special return width to order for inside mount blind

REMEMBER:

- Smallest return width is ½" (inside measurement), maximum return width is 8"
- Returns up to 1" (inside measurement) will be glued; 1¼" to 4⅝" optional glued
- The width of a return and the width of a valance are measured on the inside (back side) of the valance, not the outside (face) of the valance (see diagram at right)
- Standard return size for 2⅝" blinds and 2½" blinds—subtract ⅜" prior to determining special return width





A: Inside Measurement
B: Outside Measurement

How to Measure and Order Valances

If a valance is ordered, it is supplied in one of the following styles, depending on how your blind will be mounted. For a more custom look, the valance and returns may be special ordered to your measurements.

NOTE: Valances with returns are measured and cut from the **INSIDE** of the miter to ensure the most accurate fit when installed over the headrail or window frame.

Blinds ordered as an OUTSIDE MOUNT with requested returns will be supplied with returns sized to cover the end of the blind back to the mounting surface. If projection brackets are requested when the blind is ordered, longer returns will be sent automatically. Outside mount blinds are available without returns upon request.

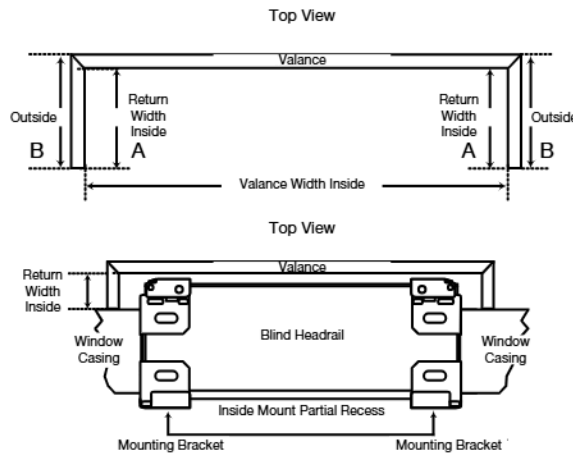

A: Inside Measurement
B: Outside Measurement

NOTE: Minimum return width is ½", maximum return width is 8".


Additional Ordering Information:

- Please state at the time of order if the valance and return measurements are for the **EXACT** size required so that no additions or deductions are made
- Different return sizes can be ordered for the same valance; always provide **LEFT** return **INSIDE** measurement first when ordering
- Returns up to 1" will be glued; 1¼" to 4⅝" optional glued; 4⅞" and greater will not be glued
- Bay and corner blinds—must specify return width on inside mount at time of order
- Single side returns are available—opposite end will be cut straight

Options

Valance Keystones

- Decorative keystones are required on wood valances that require splicing
- Keystones will be equally spaced unless special splice locations are requested at time of order
- Optional keystones can be ordered with single piece valances, or in addition to required keystones at the time of order only
 - Minimum width with a keystone: 12"
 - Maximum number of keystones: 3
- Keystones will be stained or painted to match the valance ordered as standard; optional different color selection available
- Keystones not available on premier authentic hardwood, distressed wood, coastal wood, in sandblast finish, composite, or faux wood valances
- Keystones cannot be ordered for existing valances, attachment will not work
- All inside mount applications will have a slight light gap at the top of valance when installed

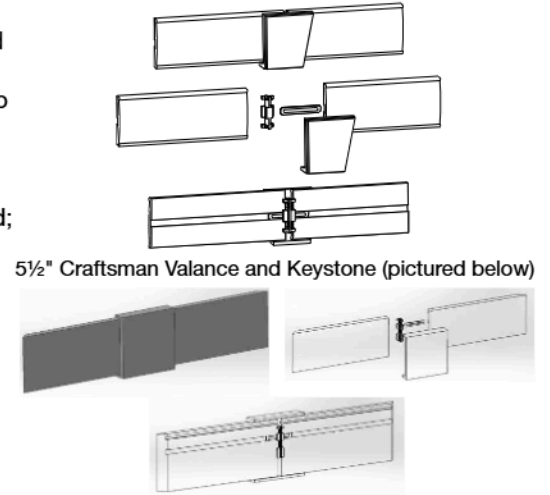

5 1/2" Craftsman Valance and Keystone (pictured below)


Splicing Requirements

Profile	Number of Sections	Number of Keystones	No Returns		With Returns (inside dimensions)	
			Minimum (inches)	Maximum (inches)	Minimum (inches)	Maximum (inches)
2 1/2" Classic Barnwood Valance*	1	0	8	100 1/4	8	98 3/8
3" Classic Wood Valance	2	1	100 1/16	200 1/2	98 7/16	198 3/8
3 1/2" Craftsman Wood Valance						
3 1/2" Legacy Wood Valance	3	2	200 9/16	300 3/4	198 11/16	298 3/8
4 1/2" Symphony Wood Valance						
5 1/2" Craftsman Valance						

*Keystones not available.


Outside Mount

- Wood valances requiring a splice will include a keystone (see chart above for details)

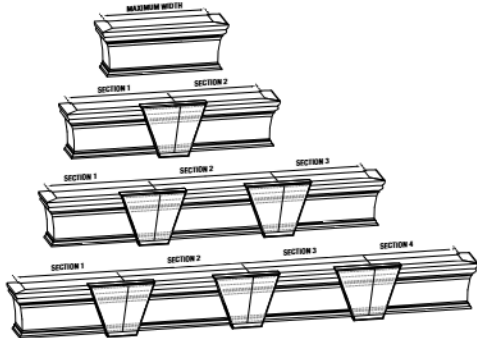


Inside Mount

- Wood valances 100 1/4" or wider will require a keystone

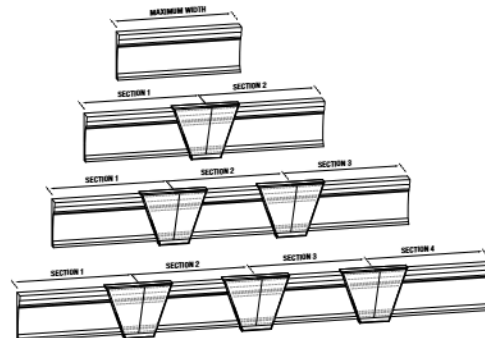

How to Measure a Special Splice Location

A keystone is supplied for valance widths that require a splice. Keystones will be equally spaced unless a special splice location is requested at time of order. The placement of the splice will be calculated by the factory using an **INSIDE** measurement from the mitered corner to the location specified on the order.

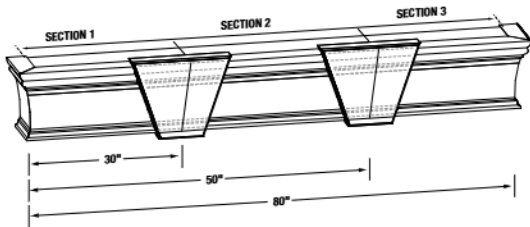

NOTE: All measurements need to be from BACKSIDE.

Each splice location should be recorded starting from the **LEFT BACKSIDE** corner.

These formulas are used to calculate BACKSIDE valance measurements.

Inside Mount with No Returns	Ordered width - 1/16"
Inside Mount with Returns	Ordered width + 3/4"
Outside Mount with No Returns	Ordered width + 1/2"
Outside Mount with Returns	Ordered width + 3/4"

Example:

Overall valance width = 80" backside measurement

First splice from left = 30" backside measurement

Second splice from left = 50" backside measurement

For surcharge, see price charts.

Options



Bay and Corner Windows

- Made as individual blinds to fit in bay or corner windows
- Each blind is on an individual headrail and has its own control
- Indicate each blind with bypass or butt; bypass is the blind mounted into the corner; butt is the blind butted up to the other blind; must provide blind location (left and right blind)
- Tilt locations can be on the right or left side of each blind; placing controls opposite the corner is recommended
- Depending on the angle, some corner blinds cannot be raised to the same height

- Manufacturer will take appropriate deductions for proper fit
- No additional charge
- Valances will be mitered in the corner for finished look
- Cornices and wood verticals are not available on bay or corner windows
- Slat alignment cannot be guaranteed on side by side blinds
- If you do not want manufacturer to take deductions DO NOT order as bay or corner

NOTE: Standard lead time does not apply for this feature. Additional manufacturing time is required.


Measuring Information

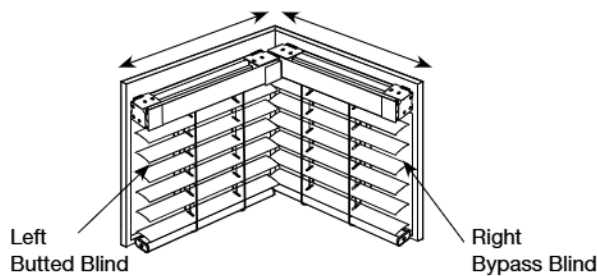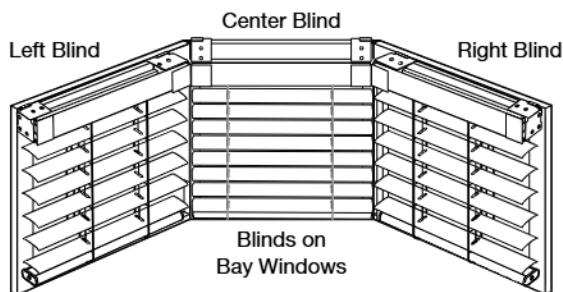

Corner Window

Measure:

Width of each window from corner to the point you would like to cover.

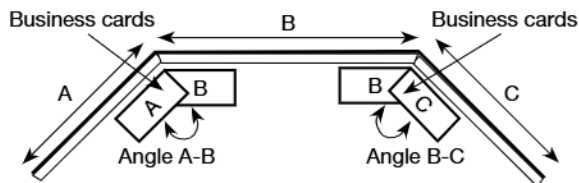

Three-Sided Bay Window


Measure:

A and C: Width of side windows from the corners to the point you would like the blind to cover.

B: Width of the center window from corner to corner.

Angle A-B: Angle between windows (A) and (B).

Angle B-C: Angle between windows (B) and (C).

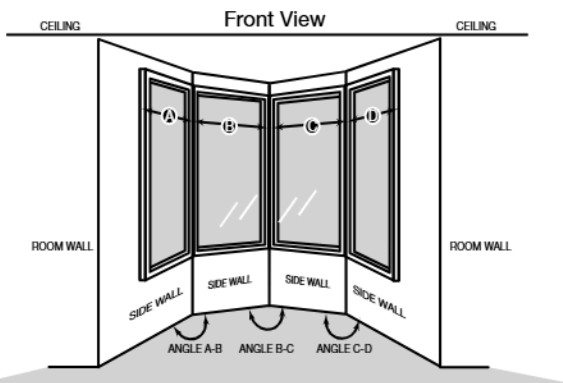

Four-Sided Bay Window

Measure:


A and D: Width of side windows from the corners to the point you would like the blind to cover.

B and C: Width of each window from corner to corner.

Angle A-B: Angle between windows (A) and (B).

Angle B-C: Angle between windows (B) and (C).

Angle C-D: Angle between windows (C) and (D).

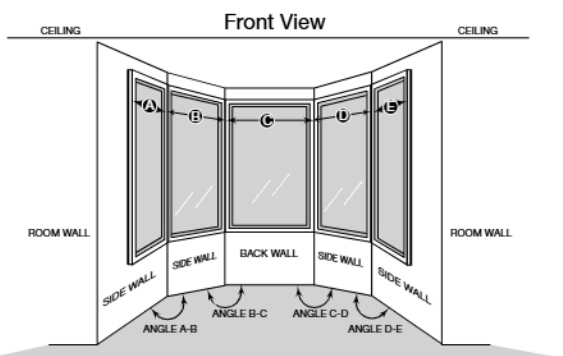

Five-Sided Bay Window

Measure:

A and E: Width of side windows from the corners to the point you would like the blind to cover.

B, C, and D: Width of each center window from corner to corner.

Angle A-B: Angle between windows (A) and (B).

Angle B-C: Angle between windows (B) and (C).


Angle C-D: Angle between windows (C) and (D).

Angle D-E: Angle between windows (D) and (E).

NOTE: Measure bay angle using protractor or angle finder, or use two business cards in bay corner as illustrated above, trace onto paper and fax to customer service.

Options

Wood Specialty Shapes: Incline Wire Blinds

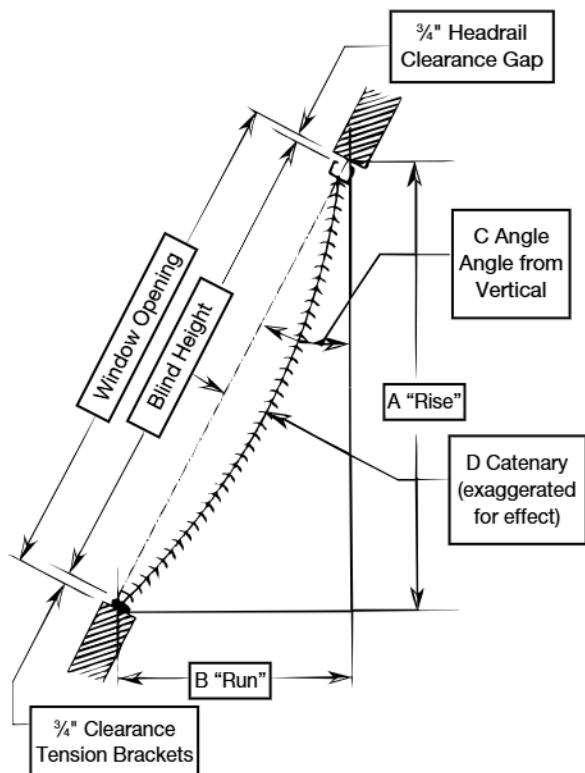

NOTE: Maximum degree from vertical is 45°. Blinds over 30° will have marginal tilt.

- Blinds up to 60" will have 2 wires
- Blinds over 60" will have 4 wires

Options Available:

- Decorative tassels
- Ring tilt (2" only)
- Custom color
- High gloss finish
- Accent color

NOTE: Due to the nature of the Elite process, specialty shapes require an extended lead time. Lead times vary depending on blind sizes and quantities.

Features

- For pricing, see price charts
- Wand tilt options available
- Wand control is the universal joint attachment
- There is a turn buckle in the headrail for adjusting the tension in the wires
- At the bottomrail, there are sill plates that are used to attach the wires to the sill
- Color coordinated box style bracket

Incline (tension) Wire Blinds

- Rectangular blinds will tilt only; may be used in windows installed vertically to 45 degrees from vertically (maximum)
- Ideal for applications that require stabilized blinds, such as boats

- A. Rise—The vertical measurement from the top of a window to the RUN to form a 90 degree angle.
- B. Run—The horizontal measurement from the bottom of a window to the RISE to form a 90 degree angle.
- C. Angle—The degree the window is slanted perpendicular (at a right angle) to the floor.
- D. Catenary—The degree a blind may possibly bow. No measurement needed. Must give measurements for width and height. A and B are used to calculate the angle (must be less than 45°).

Measuring Information

Use regular measuring instructions; see measuring instructions tab. Available on Elite wood blinds.


Size Considerations	Incline Wire (inches)	
Minimum Width	16	
Maximum Width	96	
Minimum Height	12	
Size Considerations	Blind Width (inches)	Maximum Height (inches)
Maximum Height	16 to 32	120
	32½ to 57	108
	57½ to 92	102
	92½ to 96	90

Depth Requirements	2" (inches)	2¾" (inches)
Minimum	¾	¾
Flush with Casing	2¾	2¾

NOTE: Slat alignment cannot be guaranteed on side by side blinds.

Options

Cut-Out Blinds



- For surcharge, see price charts
- Maximum cut-out is 1" before route hole (corner and side cut-outs only)
- Cut-outs are measured with the slats tilted in the closed position for maximum clearance
- The cut-out height may be larger than requested due to slat placement
- Measure height from the bottom of the window up to the desired location
- Blinds will be tilt only, no lift

NOTE: Standard lead time does not apply for this feature. Additional manufacturing time is required.

Options

Wood Specialty Shapes: Angle Top or Bottom

Features

- For pricing, see price charts
- Available in 2" and 2 $\frac{3}{8}$ " slats
- Extruded aluminum headrail
 - 2 $\frac{1}{4}$ " depth x 2" height

Controls

- Ring and wand tilt options available
- Standard wood wand lengths are 12", 20", 30", 40", and 48"
- Polycarbonate wands available in lengths over 48"
- Universal joint attachments for wand control
- Wand controls will be approximately one third the length of the blind; controls on angle top or angle bottom blinds will be located on the short side of the blind
- Due to the angle of the headrail, blinds may not operate as smoothly as a standard blind
- Maximum angle is 45°
- Blinds have tilt function only

Mounting Options

- Blinds under 24" must use hold down brackets to ensure level installation

NOTE: Due to the nature of the Elite process, specialty shapes require an extended lead time. Lead times vary depending on blind sizes and quantities.


- Lightblocking headrail is not available
- See below for measuring guidelines
- Not available with cordless lift, cut-outs, motorized tilt, or unique finishes

Size Considerations	2" (inches)	2 $\frac{3}{8}$ " (inches)
Minimum Width	15	15
Minimum Height*	12	12
Maximum Width	96	96
Maximum Height	120	120

*Long side.

Depth Requirements	2" (inches)	2 $\frac{3}{8}$ " (inches)
Minimum	$\frac{3}{4}$	$\frac{3}{4}$
Flush with Casing	$3\frac{3}{8}$	$3\frac{3}{8}$


Valance



5" Flat Valance

- Valance returns are not available

Angle Top or Bottom: Measuring Guidelines

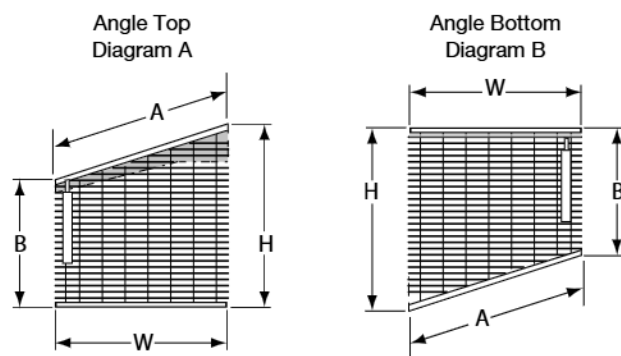

Refer to diagrams for illustrations of measurements to include when ordering an angle top or angle bottom blind.

W: Straight width

B: Length of short side

H: Length of long side

A: Angle width

Options

Wood Specialty Shapes: Trapezoid, Triangle, and Octagon

Features

- For pricing, see price charts
- Available in 2" and 2 3/8" slats
- Extruded aluminum headrail
 - 2 1/4" depth x 2" height

Controls

- Ring and wand tilt options available
- Standard wood wand lengths are 12", 20", 30", 40", and 48"
- Polycarbonate wands available in lengths over 48"
- Universal joint attachments for wand control
- Wand tilt controls will be approximately one third the length of the blind
- Due to the angle of the headrail, blinds may not operate as smoothly as a standard blind
- Blinds have tilt function only

Mounting Options

- All shapes receive predrilled openings and fasteners for direct mounting
 - Inside mounts: predrilled openings are located on the underside of the headrail
 - Outside mounts: predrilled openings are located on the front and back face of the headrail

NOTE: Due to the nature of the Elite process, specialty shapes require an extended lead time. Lead times vary depending on blind sizes and quantities.


- Lightblocking headrail is not available
- See below for measuring guidelines
- Not available with cordless lift, cut-outs, motorized tilt, or unique finishes

Size Considerations	2" (inches)	2 3/8" (inches)
Minimum Width**	15	15
Minimum Height	12	12
Maximum Width	96	96
Maximum Height	120	120

**Octagon and trapezoid: 7 1/2" exact minimum for top headrail.

Depth Requirements	2" (inches)	2 3/8" (inches)
Minimum	2 1/4	2 3/8
Flush with Casing	3 1/8	3 3/8


Valance



5" Craftsman Valance

- Valance returns are not available

Trapezoid, Triangle, or Octagon: Measuring Guidelines

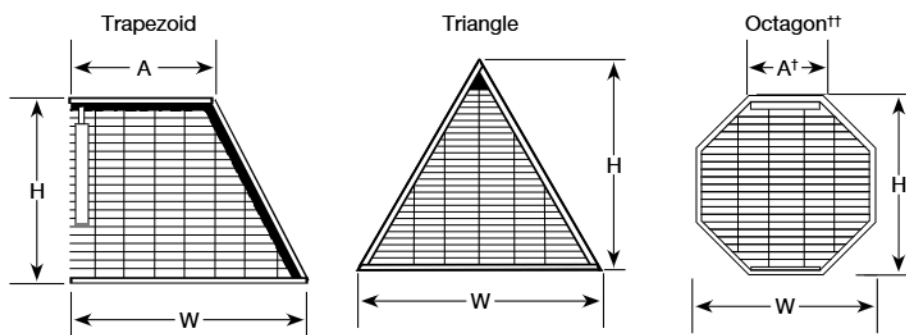

†Verify each section width.

††Depending on sizes, octagon may be framed on all sides. Contact customer service to verify if framed or not.

Refer to diagrams for illustrations of measurements to include when ordering a trapezoid, triangle, or octagon blind.

W: Bottom width

H: Length of long side

A: Top width

Also specify/include:

- Inside or outside mount
- Control location

NOTE: Non-perfect octagons will require additional measurements. Please refer to the specialty shapes reference guide.

Options

Wood Specialty Shapes: Arched Blinds

Features

- For pricing, see price charts
- Available in 2" and 2 3/8" slats
- Extruded aluminum headrail
 - 2 1/4" depth x 2" height

Controls

- Ring and wand tilt options available
- Standard wood wand lengths are 12", 20", 30", 40", and 48"
- Polycarbonate wands available in lengths over 48"
- Blinds have tilt function only
- Universal joint attachments for wand control
- Wand tilt controls will be approximately one third the length of the blind; quarter arch controls will be on the low side
- Due to the angle of the headrail, blinds may not operate as smoothly as a standard blind

Mounting Options

- We recommend hold down brackets for quarter arches less than 24" in width to ensure level installation
- Arches will receive predrilled openings and fasteners
 - Inside mounts: predrilled openings are located on the underside of the headrail
 - Outside mounts: predrilled openings are located on the front and back face of the headrail


NOTE: Due to the nature of the Elite process, specialty shapes require an extended lead time. Lead times vary depending on blind sizes and quantities.

- Lightblocking headrail is not available
- See below for measuring guidelines
- Not available with cordless lift, cut-outs, motorized tilt, or unique finishes

	2" (inches)	2 3/8" (inches)
Minimum Arch Width: Full Arch	24	24
Minimum Arch Width: Quarter Arch	15	15
Minimum Arch Height: Full Arch	12	12
Minimum Arch Height: Quarter Arch	12	12
Maximum Arch Width	96	96
Maximum Height of Extended Arches, Quarter Arches	120	120

Depth Requirements	2" (inches)	2 3/8" (inches)
Minimum	2 1/4	2 3/8
Flush with Casing	3 3/8	3 3/8


Valance



5" Craftsman Valance

- Valance returns are not available

Arched Blinds: Measuring Guidelines

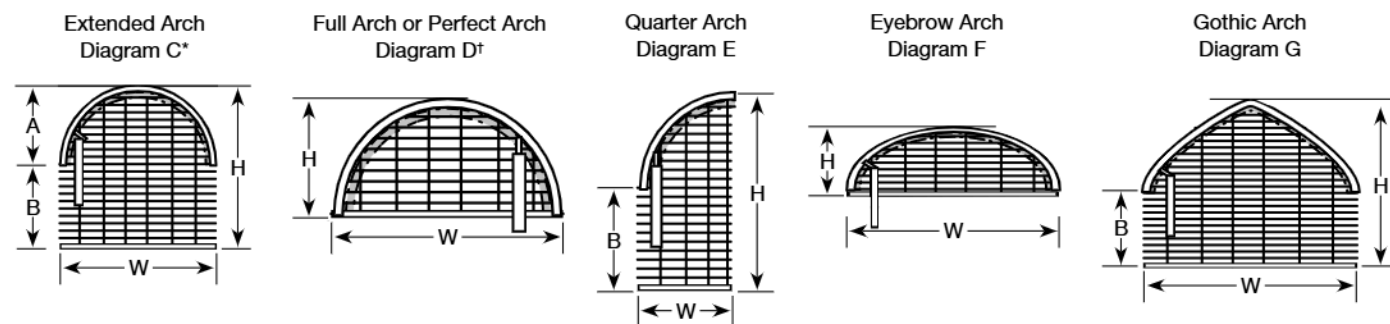

Refer to diagrams for illustrations of measurements to include when ordering an arched blind.

W: Straight width

B*: Length to springline (point where arch begins)

Template needs to extend 6" past the springline.

H*: Overall height

A: Arch height

Also specify/include:

- Inside or outside mount
- Control location

*A + B = H

†Perfect arch: height = 1/2 of width;

Perfect 1/4" = width and height are the same

NOTE: Customer required to send template or use SWF template service on all non perfect arches

Options

Wood Specialty Shapes: Ovals and Circles

Features

- For pricing, see price charts
- Available in 2" and 2 3/8" slats
- Extruded aluminum headrail
 - 2 1/4" depth x 2" height

Controls

- Ring and wand tilt options available
- Standard wood wand lengths are 12", 20", 30", 40", and 48"
- Polycarbonate wands available in lengths over 48"
- Universal joint attachments for wand control
- Wand tilt controls will be approximately one third the length of the blind
- Blinds have tilt function only

Mounting Options

- All shapes receive predrilled openings and fasteners for direct mounting
 - Inside mounts: predrilled openings are located on the underside of the headrail
 - Outside mounts: predrilled openings are located on the front and back face of the headrail

NOTES:


1. For blinds less than 16 square feet, valance may appear disproportionate in scale.
2. Due to the nature of the Elite process, specialty shapes require an extended lead time. Lead times vary depending on blind sizes and quantities.

- Lightblocking headrail is not available
- See below for measuring guidelines
- Not available with cordless lift, cut-outs, motorized tilt, or unique finishes

Size Considerations	2" (inches)	2 3/8" (inches)
Minimum Diameter Width or Height	24	24
Maximum Diameter Width or Height	72	72

Depth Requirements	2" (inches)	2 3/8" (inches)
Minimum	2 1/4	2 3/8
Flush with Casing	3 3/8	3 3/8

Valance




5" Craftsman Valance

- Valance returns are not available

NOTES:

1. Maximum spacing between ladders is 24"
2. Standard control positions: lift right/tilt left
3. Maximum slat width is 96". Wider blinds must be multiple blinds on one headrail.

Circles and Ovals: Measuring Guidelines

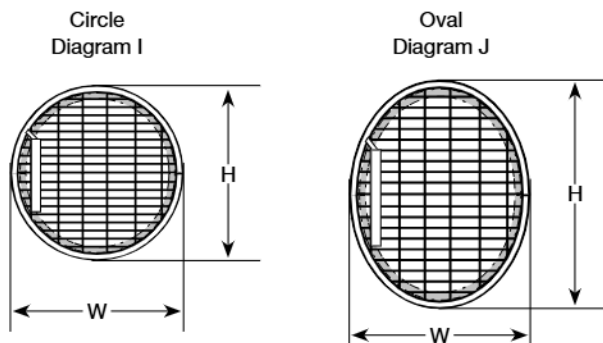

Refer to diagrams for illustrations of measurements to include when ordering a circle or oval blind.

W and H: Provide width and height.

Template required if width and height are not the same.


Also specify/include:

- Inside or outside mount
- Control location

Options

Making a Template for Specialty Blinds

1. Tape butcher paper, kraft, or construction paper over the window opening allowing plenty of overlap.
2. Being careful not to press against the template paper while tracing, draw an exact outline of the window opening. Pressing on the template paper may distort the paper and cause the wrong size to be made.
3. Remove the paper from the window opening. If the shade is an outside mount, add the desired amount of overlap to the window outline and draw a second outline around it to match the shape of the finished shade. Be sure to erase the inside line.
4. Mark the dimensions on the template. Check that the template dimensions match your measurements of the actual window opening.
NOTE: Make sure the template is of the window opening, not the glass only measurement.
5. Cut the shape from the paper.
6. PLACE THE TEMPLATE BACK INTO THE WINDOW OPENING TO CHECK FOR PROPER FIT COMPLETELY AROUND.
7. Indicate on the template
 - “Room side” and “top” on the template
 - Purchase order number
 - Customer’s name
 - Your store name and account number
8. Roll up template and place in a mailing tube. DO NOT FOLD TEMPLATE.
NOTE: If extended arch; only 6" past the springline (point where arch portion begins) is required on the template.

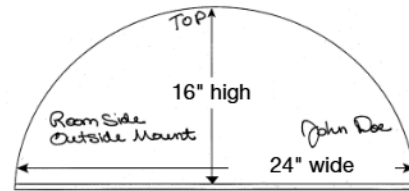

NOTE: This is just a sample for illustration purposes only—other information may be needed for your order.

Mail to: Springs Window Fashions LLC
8467 Route 405 Highway South
PO Box 500
Montgomery, PA 17752
ATTN: Specialty Department

NOTE: When mailing, make sure to get a tracking number and note your return address on the mailing tube.

ACCEPTABLE MATERIALS FOR MAKING TEMPLATES:

- Kraft paper
- Butcher paper
- Construction paper

WE WILL NOT ACCEPT TEMPLATES MADE FROM THE FOLLOWING MATERIALS:

- Newspaper
- Plastic
- Wax paper
- Fabric
- Tissue paper
- Roofing paper
- Existing arch shades
- Wrapping paper
- Cardboard
- Poster board

NOTE: If the material used to make a template stretches, tears easily, will not lay flat, will mark the fabric, or is not pre-cut from paper—IT WILL NOT BE USED.

Using Graber® Template Service

Template service is used when a customer is unable to make or supply a template.

To use the template service:

1. Select template service when entering your order online.
2. Use the specialty shapes reference guide (located on graberdirect.com) to determine what measurements you need to supply for each shape.
3. Enter the lettered measurements using line item comments.

For surcharge, see price charts.

How to measure for the template service:

- Measure the interior of the specialty application to the nearest 1/8" using a metal tape measure
- Document each measurement as outlined in “Wood Specialty Shapes: Arched Blinds” section
- Not available with gothic arch

General Information

Slat Count Table: 2" Wood Blinds

Number of Slats	2" Wood and Elite Wood Blinds	
	Finished Blind Height (inches)	Finished Stack Height (inches)
7	12	4 ⁷ / ₈
8	14 ⁵ / ₈	
9	16 ³ / ₈	
10	17 ¹³ / ₁₆	5 ³ / ₈
11	19 ¹ / ₈	
12	21 ¹ / ₄	
13	23	
14	24 ³ / ₄	
15	26 ⁷ / ₈	
16	28 ³ / ₈	
17	29 ¹⁵ / ₁₆	
18	31 ¹¹ / ₁₆	
19	33 ³ / ₈	
20	35 ⁵ / ₈	7
21	36 ⁷ / ₈	
22	38 ³ / ₈	
23	40 ¹ / ₈	
24	42 ¹ / ₈	
25	43 ¹³ / ₁₆	
26	45 ¹ / ₂	
27	47 ¹ / ₄	
28	49	
29	50 ¹¹ / ₁₆	
30	52 ⁷ / ₁₆	8 ⁷ / ₁₆
31	54 ³ / ₁₆	
32	55 ¹⁵ / ₁₆	
33	57 ³ / ₈	
34	59 ³ / ₈	
35	61 ¹ / ₈	
36	62 ¹³ / ₁₆	
37	64 ³ / ₁₆	
38	66 ³ / ₁₆	
39	68 ³ / ₁₆	
40	69 ³ / ₄	10 ¹ / ₈
41	71 ¹ / ₂	
42	73 ³ / ₄	
43	74 ¹⁵ / ₁₆	
44	76 ¹¹ / ₁₆	
45	78 ⁷ / ₁₆	
46	80 ³ / ₁₆	
47	81 ¹ / ₈	
48	83 ³ / ₈	11 ⁷ / ₁₆
49	85 ³ / ₈	
50	86	

NOTE: Finished height includes headrail and bottomrail. Excludes specialty shapes.

General Information

Slat Count Table: 2³/₈" Wood Blinds

Number of Slats	2 ³ / ₈ " Wood and Elite Wood Blinds	
	Finished Blind Height (inches)	Finished Stack Height (inches)
6	12	4 ¹⁵ / ₁₆
7	14 ⁵ / ₈	
8	16 ³ / ₄	
9	18 ¹ / ₂	
10	21	5 ⁹ / ₁₆
11	23 ¹ / ₂	
12	25 ¹ / ₄	
13	27 ³ / ₈	
14	29 ¹ / ₂	
15	31 ⁵ / ₈	
16	33 ³ / ₄	
17	35 ¹ / ₂	
18	38	
19	40 ³ / ₈	
20	42 ¹ / ₄	7 ¹ / ₈
21	44 ³ / ₈	
22	46 ¹ / ₂	
23	48 ⁵ / ₈	
24	50 ³ / ₄	
25	52 ¹ / ₂	
26	55	
27	57 ¹ / ₂	
28	59 ³ / ₄	
29	61 ⁵ / ₈	
30	63 ¹ / ₂	8 ³ / ₄
31	65 ³ / ₈	
32	67 ¹ / ₄	
33	69 ³ / ₈	
34	72	
35	74 ¹ / ₂	
36	76 ³ / ₄	
37	78 ⁵ / ₈	
38	80 ¹ / ₂	
39	82 ³ / ₈	
40	84 ¹ / ₄	10 ⁹ / ₁₆
41	86	

NOTE: Finished height includes headrail and bottomrail. Excludes specialty shapes.

General Information

Slat Count Table: 2" Composite Blinds

Number of Slats	2" Composite Blinds	
	Finished Blind Height (inches)	Finished Stack Height (inches)
5	12	4 ¹ / ₁₆
6	12 ² / ₁₆	
7	14 ¹ / ₁₆	
8	16 ¹ / ₁₆	
9	17 ¹ / ₁₆	
10	19 ¹ / ₁₆	5 ¹ / ₁₆
11	21 ¹ / ₄	
12	23	
13	24 ³ / ₄	
14	26 ¹ / ₁₆	
15	28 ³ / ₁₆	
16	29 ¹ / ₁₆	
17	31 ¹ / ₁₆	
18	33 ³ / ₈	
19	35 ¹ / ₄	
20	36 ³ / ₁₆	7
21	38 ¹ / ₁₆	
22	40 ³ / ₁₆	
23	42 ¹ / ₁₆	
24	43 ¹ / ₁₆	
25	45 ¹ / ₂	
26	47 ¹ / ₄	
27	49	
28	50 ¹ / ₁₆	
29	52 ¹ / ₁₆	
30	54 ¹ / ₁₆	8 ¹ / ₁₆
31	55 ¹ / ₁₆	
32	57 ³ / ₈	
33	59 ¹ / ₈	
34	61 ¹ / ₈	
35	62 ¹ / ₁₆	
36	64 ¹ / ₁₆	
37	66 ¹ / ₁₆	
38	68 ¹ / ₁₆	
39	69 ³ / ₄	
40	71 ¹ / ₂	10 ¹ / ₁₆
41	72	

NOTE: Finished height includes headrail and bottomrail.

General Information

Slat Count Table: 2" Premium Faux Wood and Faux Wood Blinds

Number of Slats	2" Premium Faux Wood and Faux Wood Blinds	
	Finished Blind Height (inches)	Finished Stack Height (inches)
8	12	2 ¹⁵ / ₁₆
9	13	
10	14 ³ / ₈	3 ⁷ / ₁₆
11	16 ¹ / ₂	
12	18 ¹ / ₄	
13	20	
14	21 ³ / ₈	
15	23 ³ / ₈	
16	25 ¹ / ₂	
17	26 ³ / ₈	
18	28 ³ / ₈	
19	30 ³ / ₈	
20	32 ¹ / ₂	4 ¹ / ₄
21	33 ³ / ₈	
22	35 ¹ / ₂	
23	37 ¹ / ₄	
24	39	
25	40 ³ / ₈	
26	42 ¹ / ₂	
27	44 ¹ / ₄	
28	46	
29	47 ³ / ₈	
30	49 ³ / ₈	5 ⁷ / ₁₆
31	51 ¹ / ₂	
32	52 ³ / ₈	
33	54 ³ / ₈	
34	56 ³ / ₈	
35	58 ³ / ₈	
36	59 ³ / ₈	
37	61 ¹ / ₂	
38	63 ¹ / ₄	
39	65	

Number of Slats	2" Premium Faux Wood and Faux Wood Blinds	
	Finished Blind Height (inches)	Finished Stack Height (inches)
40	66 ³ / ₈	6 ⁹ / ₁₆
41	68 ¹ / ₂	
42	70 ¹ / ₄	
43	71 ¹ / ₂	
44	73 ³ / ₈	
45	75 ³ / ₈	
46	77 ¹ / ₂	
47	78 ³ / ₈	
48	80 ³ / ₈	
49	82 ³ / ₈	
50	84	7 ¹ / ₁₆
51	85 ³ / ₈	
52	87 ¹ / ₂	
53	89 ¹ / ₄	
54	91	
55	92 ³ / ₈	
56	96	8 ⁹ / ₁₆

General Information

Slat Count Table: 2½" Premium Faux Wood and Faux Wood Blinds

Number of Slats	2½" Faux Wood and Premium Faux Wood	
	Finished Blind Height (inches)	Stack Height (inches)
7	12	2 ¹³ / ₁₆
8	13 ¹ / ₈	
9	15 ¹ / ₄	
10	17 ⁷ / ₈	3 ¹ / ₈
11	19 ¹ / ₂	
12	21 ⁵ / ₈	
13	23 ³ / ₄	
14	25 ⁷ / ₈	
15	28	
16	30 ¹ / ₈	
17	32 ¹ / ₄	
18	34 ³ / ₈	
19	36 ¹ / ₂	
20	38 ⁵ / ₈	4 ¹ / ₄
21	40 ³ / ₄	
22	42 ⁷ / ₈	
23	45	
24	47 ¹ / ₈	
25	49 ¹ / ₄	
26	51 ³ / ₈	
27	53 ¹ / ₂	
28	55 ⁵ / ₈	
29	57 ³ / ₄	
30	59 ⁷ / ₈	5 ⁷ / ₁₆
31	62	
32	64 ¹ / ₈	
33	66 ¹ / ₄	
34	68 ³ / ₈	
35	70 ¹ / ₂	
36	72 ⁵ / ₈	
37	74 ³ / ₄	
38	76 ⁷ / ₈	
39	79	
40	81 ¹ / ₈	6 ³ / ₈
41	83 ¹ / ₄	
42	85 ³ / ₈	
43	87 ¹ / ₂	
44	89 ⁵ / ₈	
45	91 ³ / ₄	
46	93 ⁷ / ₈	
47	96	7 ³ / ₈

NOTE: Finished height includes headrail and bottomrail.

General Information

Slat Route and Ladder Count Charts

Take any inside mount deductions before determining ladder quantity (inside mount— $\frac{1}{2}$ "; outside mount—no deduction). Excludes specialty shapes.

Traditions 2" and 2 $\frac{3}{8}$ " Wood Blinds

For Standard or Reverse Controls

Finished Blind Width (inches)	Slat End Route (inches)	# of Ladders	# of Center Brackets
12 to 24	4	2	Refer to Installation Guide
24 $\frac{1}{16}$ to 36 $\frac{1}{2}$	6 $\frac{1}{2}$	2	
36 $\frac{3}{16}$ to 50	6 $\frac{1}{2}$	3	
50 $\frac{1}{16}$ to 60	6 $\frac{1}{2}$	3	
60 $\frac{1}{16}$ to 84	6 $\frac{1}{2}$	4	

NOTES:

1. Maximum spacing between ladders is 23 $\frac{1}{2}$ ".
2. Standard control positions: tilt left; tilt right is optional.
3. Maximum width is 84". Wider blinds must be multiple blinds on one headrail.

2" and 2 $\frac{3}{8}$ " Elite Wood Blinds

For Standard or Reverse Controls

Finished Blind Width (inches)	Slat End Route (inches)	# of Ladders	# of Center Brackets
12 to 24	4	2	Refer to Installation Guide
24 $\frac{1}{16}$ to 36 $\frac{1}{2}$	6 $\frac{1}{2}$	2	
36 $\frac{3}{16}$ to 50	6 $\frac{1}{2}$	3	
50 $\frac{1}{16}$ to 60	6 $\frac{1}{2}$	3	
60 $\frac{1}{16}$ to 84	6 $\frac{1}{2}$	4	

NOTES:

1. Maximum spacing between ladders is 23 $\frac{1}{2}$ ".
2. Standard control positions: tilt left; tilt right is optional.
3. Maximum width is 84". Wider blinds must be multiple blinds on one headrail.

General Information

Slat Route and Ladder Count Charts

Take any inside mount deductions before determining ladder quantity (inside mount— $\frac{1}{2}$ "; outside mount—no deduction).

Traditions 2" Composite Blinds

For Standard or Reverse Controls

Finished Blind Width (inches)	Slat End Route (inches)	# of Ladders	# of Center Brackets
12 to 22	4	2	Refer to Installation Guide
22 $\frac{1}{16}$ to 38	5	3	
38 $\frac{1}{16}$ to 52	5	4	
52 $\frac{1}{16}$ to 66	5	5	

NOTES:

- Maximum spacing between ladders is 14".
- Standard control positions: tilt left; tilt right is optional.
- Maximum width is 66". Wider blinds must be multiple blinds on one headrail.

Lake Forest 2" and 2½" Premium Faux Wood and Faux Wood Blinds with Cordless Lift

For Standard or Reverse Controls

Finished Blind Width (inches)	# of Ladders	# of Center Brackets
17* to 27¼	2	Refer to Installation Guide
27 $\frac{1}{16}$ to 38	3	
38 $\frac{1}{16}$ to 48	4	
48 $\frac{1}{16}$ to 58½	5	
58 $\frac{1}{16}$ to 59½	6	
69 $\frac{1}{16}$ to 79	7	
79 $\frac{1}{16}$ to 90	8	
90 $\frac{1}{16}$ to 96	9	


NOTES:

- Standard control positions: tilt left; tilt right is optional.
- Maximum width is 96". Wider blinds must be multiple blinds on one headrail.

*17½" is the minimum width for 2½" Faux Wood Cordless Lift blinds.


General Information

Cordless Lift Blinds Product Detail: 2" and 2½" Premium Faux Wood and Faux Wood

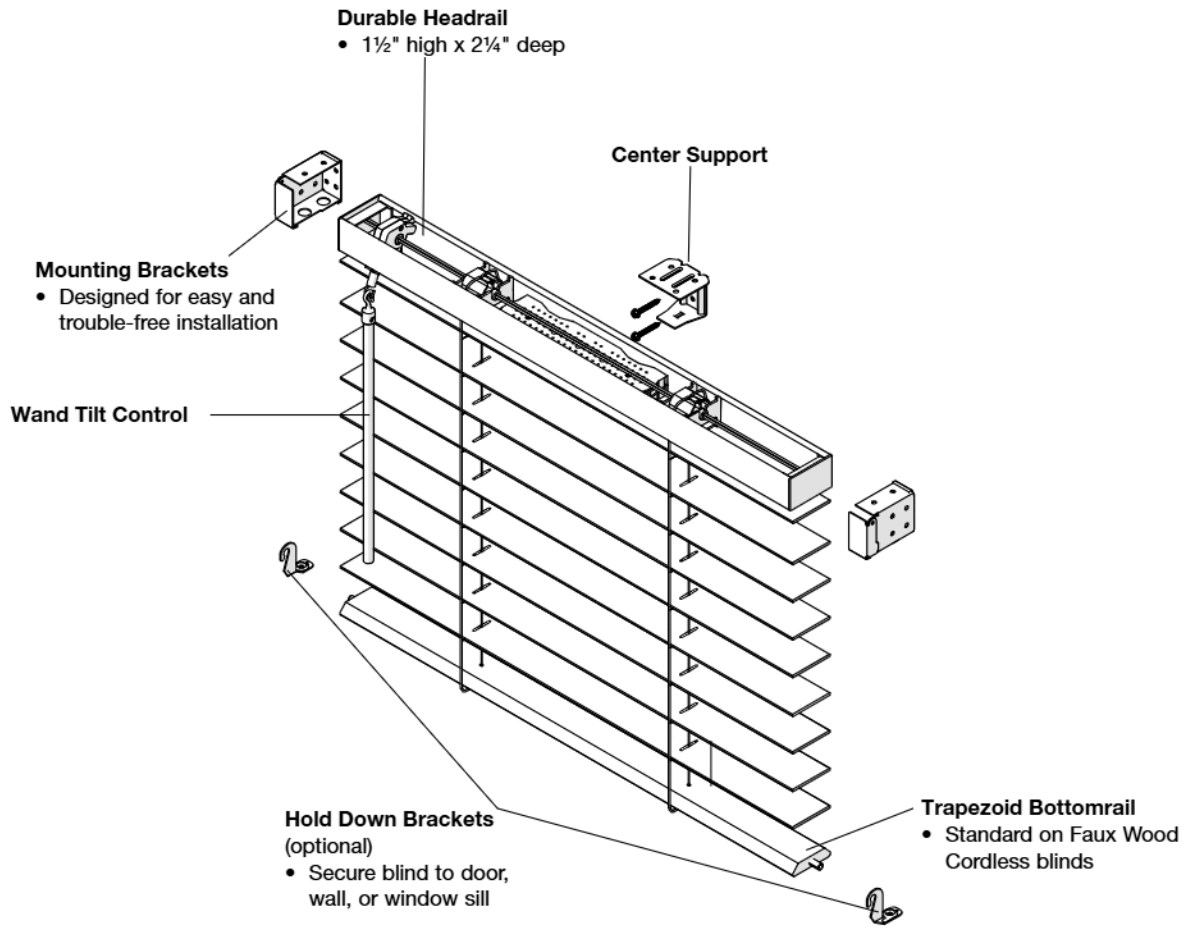


To lower blind, simply pull down on the bottomrail. To raise the blind, simply guide the blind into the desired location by gently lifting the bottomrail.

Slat Comparison



General Information

Cordless Lift Blinds Product Detail: 2" and 2³/₈" Wood, 2" Composite

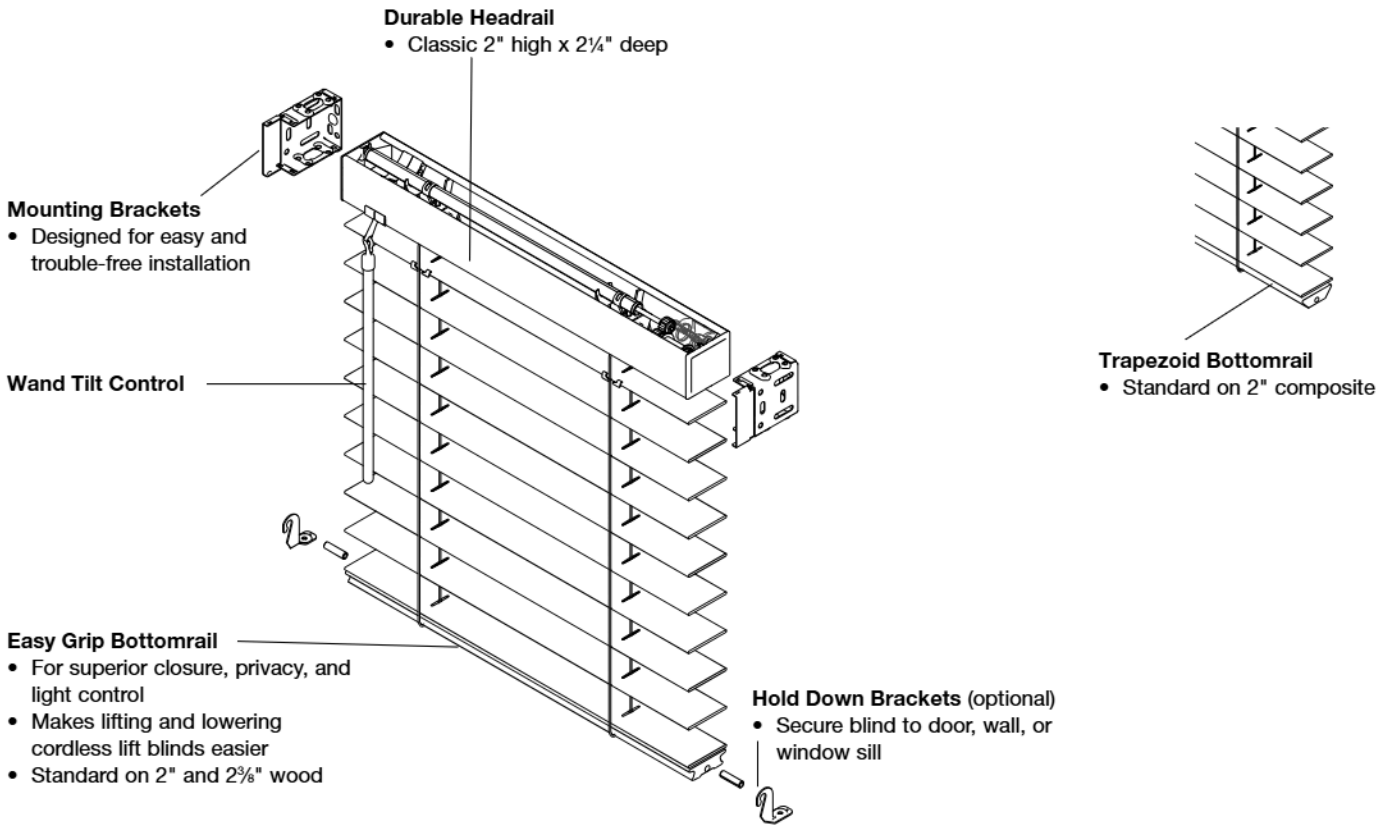

To lower blind, simply pull down on the bottomrail. To raise the blind, simply guide the blind into the desired location by gently lifting the bottomrail.

Slat Comparison

