

Mounting Requirement

Minimum Depth Requirements and Valance Returns


- Valance return locations: both left and right returns
- Standard or custom sizes available
 - Custom valance return size: minimum ½" and maximum 5"

Inside Mount


Blind/Valance Type	Fully Recessed IB	Semi-IB with bracket flush to wall	Semi-IB Minimum Mounting Depth
2" & 2 ½" Blinds with No Valance	2 13/16"	N/A	1 ½"
2" & 2 ½" Blind with Modern Curved Valance	3 7/8"	2 7/8" *Valance return size: 3/4"	1 5/8" *Valance return size: 2"
2" & 2 ½" Blind with Designer Crown Valance	4 1/16"	2 7/8" *Valance return size: 3/4"	1 5/8" *Valance return size: 2"

Outside Mount


Blind/Valance Type	OB return size
2" & 2 ½" Blinds with any valance	Valance return size: 3 9/16"

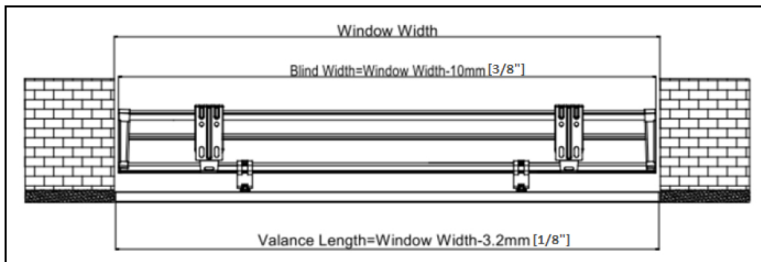


Fully IB

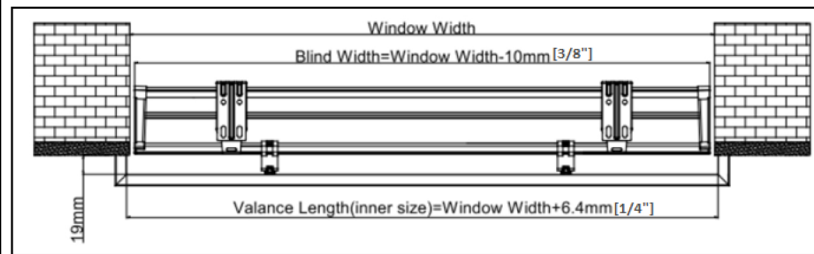

Semi-IB with bracket flush to wall with 3/4" valance return

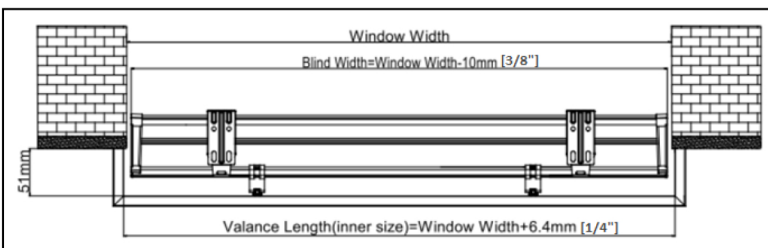

Semi-IB min mounting depth with 2" valance return

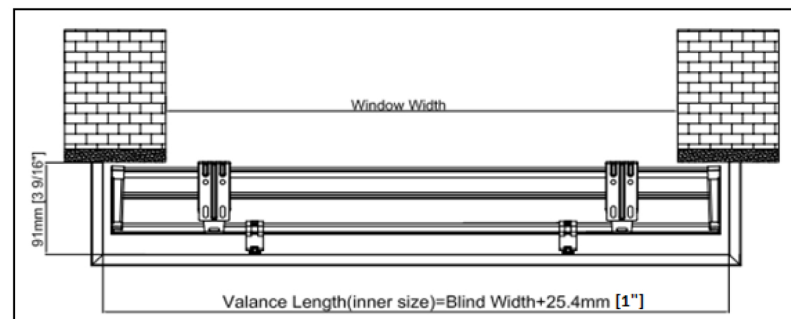

OB