

Mounting Requirement

Minimum Depth Requirements and Valance Returns


- Valance return locations: left only, right only or both left and right returns
- Standard or custom sizes available
 - Custom valance return size: minimum 1/2" and maximum 5"

Inside Mount


Blind/Valance Type	Fully Recessed IB	Semi-IB with bracket flush to wall	Semi-IB Minimum Mounting Depth	Semi-IB with shallow depth mounting holes
2" & 2 1/2" Blinds with No Valance	2 11/16"	N/A	1 5/8"	15/16"
2" & 2 1/2" Blind with Modern Curved Valance	3 7/8"	2 11/16" *Valance return size: 7/8"	1 5/8" *Valance return size: 2"	15/16" *Valance return size: 2 5/8"
2" & 2 1/2" Blind with Designer Crown Valance	4 1/16"	2 11/16" *Valance return size: 7/8"	1 5/8" *Valance return size: 2"	15/16" *Valance return size: 2 5/8"

Outside Mount


Blind/Valance Type	OB return size
2" & 2 1/2" Blinds with any valance and return	Valance return size: 3 9/16"
2" & 2 1/2" Blinds with any valance without return	N/A

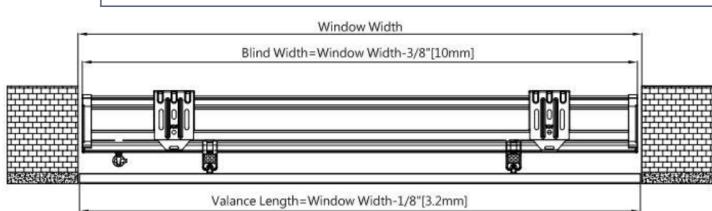


Fully IB with flush valance

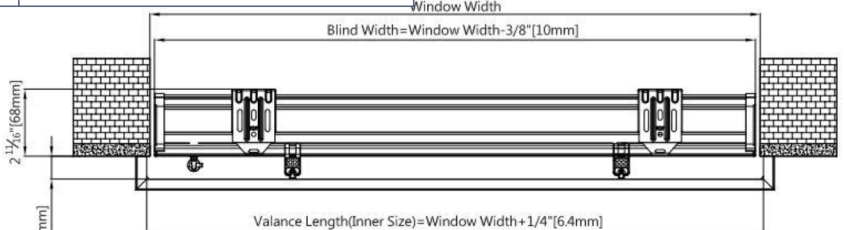


Semi-IB with bracket flush to wall

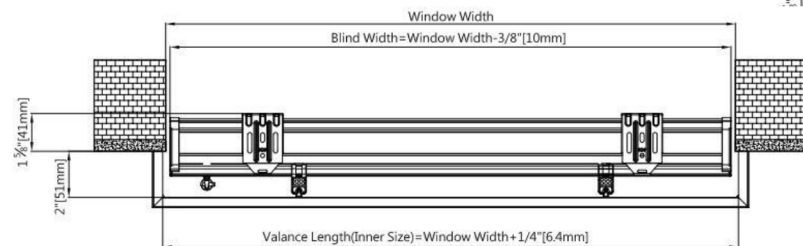

Semi-IB with min mounting depth

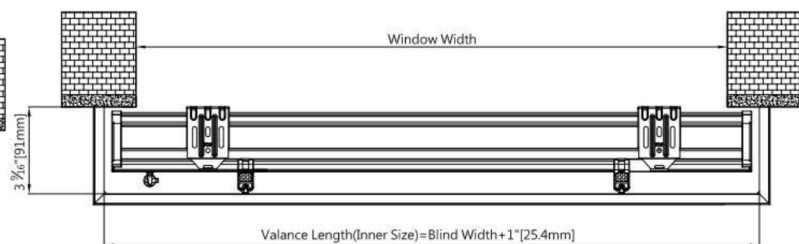

OB with Valance and returns

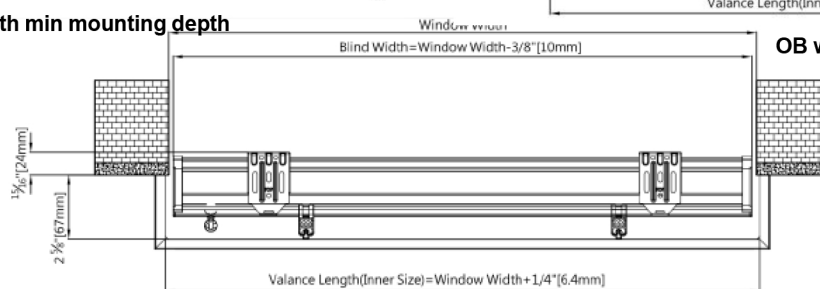

Semi-IB with shallow mounting holes