


TRILIGHT CONFIGURATION SPECIFICATIONS

TRILIGHT – CONTINUOUS CORD LOOP



Features same headrail as continuous cord loop system.

Options:

- Color-Coordinated painted rails - no extra charge
– Headrail, bottomrail, and middle rail, end caps, cord loops, and handles will color-coordinate to the bottom (honeycomb) fabric
- Fabric wrapped rails - surcharge applies
– fabric wrapped headrail, bottomrail, and middle rail, end caps, cord loops, and handles will coordinate to the bottom (honeycomb) fabric
- Headrail can be fabric wrapped to match the top (sheer) fabric - surcharge applies
– Rails, end caps, cord loops, and handles will color-coordinate to the bottom (honeycomb) fabric

The tensioner has been pre-selected in one of five colors, White, Vanilla, Light Brown, Dark Brown & Black. The tensioner color may be overridden during order entry

NOTES:

- Right loop control operates the middle rail, left loop control operates the bottomrail.
- TriLight is not available with 3/8" single cell, 3/4" Sheer, 3/4" Semi-Sheer, 1-1/4"

Cut-outs are not available on TriLight Shades.

CONTINUOUS CORD LOOP SIZE STANDARDS				
	Honeycomb			2" Hybrid Pleat
	All 3/4" Light Filtering Fabrics	All 3/4" Blackout Fabrics	All 1/2" Double Cell Fabrics	Peaceful Allure Hybrid Pleat **
Min. Width (net)	24"	24"	24"	24"
Max. Width*	83" - 96"	83" - 96"	83" - 96"	83" - 96"
Max. Width-End Mount	48"	48"	48"	42"
Min. Height	12"	12"	12"	12"
Max. Height	96"	96"	96"	96"
Max. Area (sq. ft.)	64"	50"	50"	60"

* Not available with 3/8" Fabrics

* Not available with 3/4" Peaceful Allure Room Darkening Fabrics or 3/4" Lanai, Coastal, Enchanting Allure Fabrics

** Not available with Lanai Allure Hybrid, Coastal Allure Hybrid, or Enchanting Allure Hybrid

* The bottom panel fabric width can be reduced by the ordered sheer fabric (top panel), if the sheer max width is less than the bottom panel max width.

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.

NOTE: Measurements may vary $\pm 1/8"$

	Honeycomb	2" Hybrid Pleat
Inside (IB) Mounts		
Headrail unit	- 1/4"	- 1/4"
Shade height	ordered height	ordered height
Fabric width	- 3/8"	- 7/8"
End (EB) Mounts		
Headrail unit	- 1/2"	- 1/2"
Shade height	ordered height	ordered height
Fabric width	- 5/8"	- 1-1/8"
Outside (OB) Mount		
Headrail unit	ordered width	ordered width
Shade height	ordered height	ordered height
Fabric width	- 1/8"	- 5/8"

MOUNTING REQUIREMENTS

Adjustments are taken from ordered dimensions.

	Honeycomb	2" Hybrid Pleat
Inside (IB) & End (EB) Mounts		
Minimum mounting depth	3/4"	3/4"
Minimum mounting depth, flush mount:	2-1/8"	2-1/8"
Outside (OB) Mount		
Minimum flat vertical surface	1-1/2"	1-1/2"

NOTE: Inside mount with hold down brackets deductions:

Headrail -1/2"

Fabric -5/8"


Bottomrail -1/2"

FABRIC AND HARDWARE STACKING

- **HONEYCOMB CONTINUOUS CORD LOOP TRILIGHT:** Take 2-1/2" for rails, plus 1/8" for each 12" of honeycomb shade height, plus 1/8" for each 12" of pleated shade height.
- **2" HYBRID PLEAT CONTINUOUS CORD LOOP TRILIGHT:** Take 2-1/2" for rails, plus 1/4" for each 12" of shade height, plus 1/8" for each 12" of pleated shade height. Allow 1-1/2" for fabric fold over.

TRILIGHT CONFIGURATION SPECIFICATIONS

TRILIGHT – CORDLESS



Sheer pleated lifts and lowers from the middle rail. Honeycomb and 2" Hybrid Pleat lift and lower from the bottomrail. No lift cords are necessary.

Options:

- Color-Coordinated painted rails - no extra charge
– Headrail, bottomrail, and middle rail, end caps, cord loops, and handles will color-coordinate to the bottom (honeycomb) fabric
- Fabric wrapped rails - surcharge applies
– fabric wrapped headrail, bottomrail, and middle rail, end caps, cord loops, and handles will coordinate to the bottom (honeycomb) fabric
- Headrail can be fabric wrapped to match the top (sheer) fabric - surcharge applies
– Bottomrail, end caps, cord loops, and handles will color-coordinate to the bottom (honeycomb) fabric



NOTES:

- Shades over 42" will have two handles in the middle rail and two handles in the bottomrail. Single handle available, must be selected during order entry.

- Cordless Trilight is not available with 3/8" single cell, 3/4" Sheer, 3/4" Semi-Sheer

Cut-outs are not available on Trilight Shades.

CORDLESS LIFT SIZE STANDARDS		
	Honeycomb	2" Hybrid Pleat *
	All Fabrics*	Peaceful Allure Hybrid Pleat **
Min. Width (net)	16"	16"
Max. Width*	83" - 96"	83" - 96"
Max. Width-End Mount	48"	42"
Min. Height	12"	12"
Max. Height	84"	84"
Max. Area (sq. ft.)	70	60

* Not available with 3/8" Fabrics

* Not available with 3/4" Peaceful Allure Room Darkening Fabrics or 3/4" Lanai, Coastal, Enchanting Allure Fabrics

** Not available with Lanai Allure Hybrid, Coastal Allure Hybrid, or Enchanting Allure Hybrid

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.

NOTE: Measurements may vary $\pm 1/8"$

	Honeycomb	2" Hybrid Pleat
Inside (IB) Mounts		
Headrail unit	- 1/4"	- 1/4"
Shade height	ordered height	ordered height
Fabric width	- 3/8"	- 3/8"
End (EB) Mounts		
Headrail unit	- 1/2"	- 1/2"
Shade height	ordered height	ordered height
Fabric width	- 5/8"	- 5/8"
Outside (OB) Mount		
Headrail unit	ordered width	ordered width
Shade height	ordered height	ordered height
Fabric width	- 1/8"	- 1/8"

MOUNTING REQUIREMENTS

Use a metal tape measure for all measurements.

	Honeycomb	2" Hybrid Pleat
Inside (IB) & End (EB) Mount		
Minimum mounting depth	3/4"	3/4"
Minimum mounting depth, flush mount:	2-1/8"	2-1/8"
Outside (OB) Mount		
Minimum flat vertical surface	1-1/2"	1-1/2"

NOTE: Inside mount with hold down brackets deductions:

Headrail -1/2"

Fabric -5/8"


Bottomrail -1/2"

FABRIC AND HARDWARE STACKING

- **HONEYCOMB CORDLESS TRILIGHT:** Take 2-1/2" for rails, plus 1/8" for each 12" of honeycomb shade height, plus 1/8" for each 12" of pleated shade height.
- **2" HYBRID PLEAT CORDLESS TRILIGHT:** Take 2-1/2" for rails, plus 1/4" for each 12" of shade height, plus 1/8" for each 12" of pleated shade height. Allow 1-1/2" for fabric fold over.

TRILIGHT CONFIGURATION SPECIFICATIONS

TRILIGHT – CORDLESS LIFT & LOCK

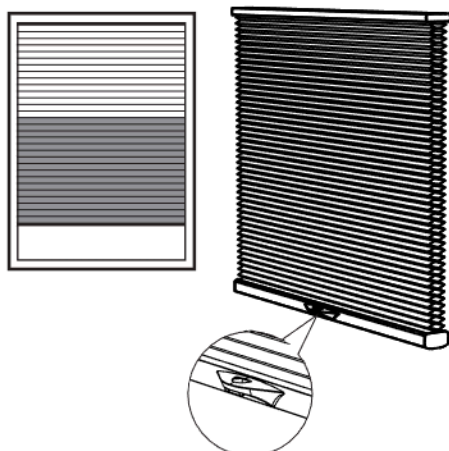

CORDLESS LIFT & LOCK SIZE STANDARDS				
	Honeycomb			2" Hybrid Pleat *
	All 3/4" Light Filtering Fabrics	All 3/4" Blackout Fabrics	All 1/2" Double Cell Fabrics	Peaceful Allure Hybrid Pleat **
Min. Width (net)	12"	12"	12"	12"
Max. Width*	84"	84"	84"	84"
Max. Width-End Mount	48"	48"	48"	42"
Min. Height	12"	12"	12"	12"
Max. Height	84"	84"	84"	84"
Max. Area (sq. ft.)	49	49	49	49

* Note available with 3/4" Peaceful Allure Room Darkening Fabrics or 3/4" Lanai, Coastal, Enchanting Allure Fabrics

** Not available with Lanai Allure Hybrid, Coastal Allure Hybrid, or Enchanting Allure Hybrid

Options:

- Color-Coordinated painted rails - no extra charge
 - Headrail, bottomrail, and middle rail, end caps, cord loops, and handles will color-coordinate to the bottom (honeycomb) fabric
- Fabric wrapped rails - surcharge applies
 - fabric wrapped headrail, bottomrail, and middle rail, end caps, cord loops, and handles will coordinate to the bottom (honeycomb) fabric

Must be specified when order is placed.

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.

NOTE: Measurements may vary $\pm 1/8"$

	Honeycomb	2" Hybrid Pleat
Inside (IB) Mounts		
Headrail unit	- 1/4"	- 1/4"
Shade height	ordered height	ordered height
Fabric width	- 3/8"	- 3/8"
End (EB) Mounts		
Headrail unit	- 1/2"	- 1/2"
Shade height	ordered height	ordered height
Fabric width	- 5/8"	- 5/8"
Outside (OB) Mount		
Headrail unit	ordered width	ordered width
Shade height	ordered height	ordered height
Fabric width	- 1/8"	- 1/8"

MOUNTING REQUIREMENTS

Use a metal tape measure for all measurements.

	Honeycomb	2" Hybrid Pleat
Inside (IB) & End (EB) Mounts		
Minimum mounting depth	1-1/4"	1-1/4"
Minimum mounting depth, flush mount:	2-1/4"	2-1/4"
End (OB) Mount		
Minimum flat vertical surface	2"	2"
Outside (OB) Mount		
Minimum flat vertical surface	1"	1"


Note: Inside mount with hold down brackets deductions:
Headrail - 1/2", Fabric - 5/8", Bottomrail - 1/2"

FABRIC AND HARDWARE STACKING

- **HONEYCOMB CORDLESS LIFT & LOCK TRILIGHT:** Take 2-1/4" for bottomrail and intermediate rail, plus 5/8" for headrail, plus 1/8" for each 12" of honeycomb shade height, plus 1/8" for each 12" of pleated shade height.
- **2" HYBRID PLEAT CORDLESS LIFT & LOCK TRILIGHT:** Take 2-1/4" for bottomrail and intermediate rail, plus 5/8" for headrail, plus 1/4" for each 12" of shade height, plus 1/8" for each 12" of pleated shade height. Allow 1-1/2" for fabric fold over.

TRILIGHT CONFIGURATION SPECIFICATIONS

TRILIGHT – BLISS AUTOMATION



Sheer pleated lifts and lowers from the middle rail. Honeycomb and 2" Hybrid Pleat lift and lower from the bottomrail. No lift cords are necessary.

BLISS AUTOMATION - SIZE STANDARDS				
	Honeycomb		2" Hybrid Pleat	
	All Available Fabrics*		Peaceful Allure Hybrid Pleat **	
	Right Side Control	Left Side Control	Right Side Control	Left Side Control
Min. Width (net)	30"	35"	30"	35"
Max. Width*	83" - 96"	83" - 96"	83" - 96"	83" - 96"
Min. Height	18"	18"	18"	18"
Max. Height	96"	96"	96"	96"
Max. Area (sq. ft.)	n/a *	n/a	n/a	n/a

NOTE: H62 Serene FR Light Filtering, 65 MAX Sq Ft

End Mount not available

Not available with 1-1/4", 3/8", or 3/4" Peaceful Allure Room Darkening Fabrics or 3/4" Lanai, Coastal, Enchanting Allure Fabrics

** Not available with Lanai Allure Hybrid, Coastal Allure Hybrid, or Enchanting Allure Hybrid

Options:

- Color-Coordinated painted rails - no extra charge
- Headrail, bottomrail, and middle rail, end caps, cord loops, and handles will color-coordinate to the bottom (honeycomb) fabric
- Fabric wrapped rails - surcharge applies
- fabric wrapped headrail, bottomrail, and middle rail, end caps, cord loops, and handles will coordinate to the bottom (honeycomb) fabric
- Headrail can be fabric wrapped to match the top (sheer) fabric - surcharge applies
- Bottomrail, end caps, cord loops, and handles will color-coordinate to the bottom (honeycomb) fabric

NOTES:

- TriLight with Bliss Automation is not available with 3/8" single cell, 3/4" Sheer, 3/4" Semi-Sheer or 1-1/4" fabrics.

Cut-outs are not available on TriLight Shades.

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.

	Honeycomb	Hybrid Pleat
Inside (IB) Mounts		
Headrail unit	- 1/4"	- 1/4"
Shade height	ordered height	ordered height
Fabric width	- 3/8"	- 3/8"
Outside (OB) Mount		
Headrail unit	ordered width	ordered width
Shade height	ordered height	ordered height
Fabric width	- 1/8"	- 1/8"

NOTE: Measurements may vary $\pm 1/8"$

MOUNTING REQUIREMENTS

Use a metal tape measure for all measurements.

Honeycomb & Hybrid Pleat	
Inside (IB) Mount	
Minimum mounting depth	3/4"
Minimum mounting depth, flush mount:	2-1/8"
Outside (OB) Mount	
Minimum flat vertical surface	1-1/2"

Honeycomb & Hybrid Pleat	
Inside (IB) Mount	
Minimum mounting depth	2-5/8"
Minimum mounting depth, flush mount	3-1/4"
Outside (OB) Mount	
Minimum flat vertical surface	1-1/2"

Note: Inside mount with hold down brackets deductions:
Headrail - 1/2", Fabric - 5/8", Bottomrail - 1/2"

FABRIC AND HARDWARE STACKING

- **HONEYCOMB CORDLESS LIFT & LOCK TRILIGHT:** Take 2-1/4" for bottomrail and intermediate rail, plus 5/8" for headrail, plus 1/8" for each 12" of honeycomb shade height, plus 1/8" for each 12" of pleated shade height.
- **2" HYBRID PLEAT CORDLESS LIFT & LOCK TRILIGHT:** Take 2-1/4" for bottomrail and intermediate rail, plus 5/8" for headrail, plus 1/4" for each 12" of shade height, plus 1/8" for each 12" of pleated shade height. Allow 1-1/2" for fabric fold over.

BLISS AUTOMATION CONFIGURATION SPECIFICATIONS

BLISS AUTOMATION BU & TDBU 0.6 LI-ION (INTERNAL BATTERY)



- Li-ion = Features Internal Battery
- Features the same headrail and bottomrail as Cordless Lift, and Continuous Cord Loop. Fabric wrapped rails are available for a **surcharge**. Color-coordinated rails are available at **no additional charge**. Must be specified when ordering.

SIZE STANDARDS

	Bottom-Up					Top-Down/Bottom-Up		Top-Down/Bottom-Up 2" Hybrid Pleat (HP98, HP99, HP97)	
	Honeycomb Fabrics 3/8", 3/4", Double Cell	3/4" Peaceful Allure Room Darkening Fabrics	Peaceful Allure Hybrid Pleat **	2" Hybrid Pleat (HP98, HP99, HP97)	1-1/4" Fabrics	Right Side Control	Left Side Control	Right Side Control	Left Side Control
Minimum NET Width*	18-1/8"	18"	18-1/8"	18-1/8"	24"	30"	35"	30"	35"
Maximum Width	120"	108"	120"	96"	120"	120"	120"	96"	96"
Minimum Height	12"	12"	12"	12"	18"	18"	18"	18"	18"
Maximum Height	108"	108"	108"	108"	108"	108"	108"	108"	108"

NOTE: Max height varies by width and fabric type. Refer to chart on page 50-51

End Mount not available

*The minimum inside mount width is 19" when ordered with hold-down brackets, and 25" for 1-1/4"

** Lanai Allure Hybrid, Coastal Allure Hybrid, or Enchanting Allure Hybrid Max Area 45 Sq Feet

2-on-1 HEADRAIL - SIZE STANDARDS

	Bottom-Up		
	Honeycomb Fabrics 3/8", 3/4", Double Cell	2" Peaceful Allure Hybrid Pleat **	1-1/4" Fabrics
Minimum NET Width (per panel)	20"	20"	24"
Minimum NET Width (overall)	40"	40"	48"
Maximum Width (per panel)	120"	120"	120"
Maximum Width (overall)	144"	144"	144"
Minimum Height	12"	12"	12"
Maximum Height	108"	108"	108"

NOTE: Max height varies by width and fabric type. Refer to chart on page 50

* Not available with 3/4" Peaceful Allure Room Darkening Fabrics

** Not available with Lanai Allure Hybrid, Coastal Allure Hybrid, or Enchanting Allure Hybrid

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.

Honeycomb & Hybrid

Inside (IB) Mounts	
Headrail unit	- 1/4"
Shade height	ordered height
Fabric width	- 3/8"
Outside (OB) Mount	
Headrail unit	ordered width
Shade height	ordered height
Fabric width	- 1/8"

NOTE: Measurements may vary $\pm 1/8"$

MOUNTING REQUIREMENTS

Use a metal tape measure for all measurements.

Internal Battery - Top-Down/Bottom-Up

Honeycomb & Hybrid Pleat

Inside (IB) Mount	
Minimum mounting depth	3/4"
Minimum mounting depth, flush mount:	2-1/8"
Outside (OB) Mount	
Minimum flat vertical surface	1-1/2"

1-1/4" Fabrics

Inside (IB) & End (EB) Mounts	
Minimum mounting depth	1-5/8"
Minimum mounting depth, flush mount:	3"
Outside (OB) Mount	
Minimum flat vertical surface	1-1/2"

Extension Brackets required for Battery - Mounted to the back of the Headrail