

CLASSIC SKYLIGHT CONFIGURATION SPECIFICATIONS

NOTE: Use metal tape measure for all measurements. Measures to 1/8 inch.

CLASSIC SKYLIGHT



This easy to operate system holds shades in place. Perfect for skylights and other windows beyond reach.



- Hardware color: Aspen White (785)
- Manually operated with handle
- Ends of headrail, moving rail and anchor rail are enclosed by side tracks
- Features a two-cell fabric gasket attached to the headrail; eliminates light leakage when shade is closed
- 5' adjustable extension pole – extends to 10'

STACK LOCATION:	WINDOW POSITION:
 Top	 Vertical
 Bottom	 Sloped
 Side	 Horizontal

Note: Pleats will have a vertical orientation when side stack is ordered.



Optional Extension Pole
Extends 5' to 10'
(Part #400036-81511)

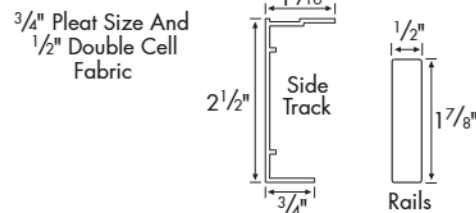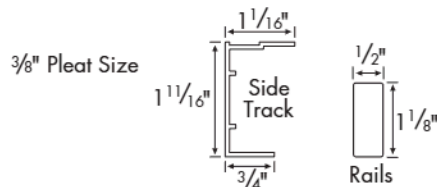

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.

Inside (IB) Mount	
Headrail unit	- 3/16"
Shade height	ordered height
Fabric width	- 3/4"
Outside (OB) Mount	
Headrail unit	+ 3/4"
Shade height	ordered height
Valance width	ordered width

NOTE: All finished dimensions include side tracks.

NOTE: Measurements may vary $\pm 1/8$ "

CLASSIC SKYLIGHT – SIZE STANDARDS

	Honeycomb All Fabrics *
Min. Width	18"
Max. Width	60"
Min. Height	6"
Max. Height	72"
Max Area (sq. ft.)	25

* Classic Skylight not available with 1/-1/4", 2" Hybrid Pleat or 3/4" Peaceful Allure Room Darkening or 3/4" Lanai, Coastal, Enchanting Allure Fabrics

NOTE: Shades over 36" wide require support cords.

Rail stiffener is required when shade is over 42" wide.

CLASSIC SKYLIGHT SIDE STACK – SIZE STANDARDS

	Honeycomb All Fabrics *
Min. Width	6"
Max. Width	72"
Min. Height	18"
Max. Height	60"
Max Area (sq. ft.)	25

* Classic Skylight not available with any 1-1/4", 2" Hybrid Pleat, 3/4" Peaceful Allure Room Darkening or 3/4" Lanai, Coastal, Enchanting Allure Fabrics

MOUNTING REQUIREMENTS

Use a metal tape measure for all measurements.

Inside (IB) Mounts		3/8" Single
Minimum mounting depth IB:		1"
Minimum mounting depth, flush mount:		1-11/16"
Outside (OB) Mount		3/8" Single
Minimum flat vertical surface		5/8"
Inside (IB) Mounts		3/4" Single and 1/2" Double
Minimum mounting depth IB:		1-1/4"
Minimum mounting depth, flush mount:		2-1/2"
Outside (OB) Mount		3/4" Single and 1/2" Double
Minimum flat vertical surface		1"

SKYLIGHT WITH AUTOMATION CONFIGURATION SPECIFICATIONS

NOTE: Use metal tape measure for all measurements. Measures to 1/8 inch.

SKYLIGHT WITH AUTOMATION

Skylights with Automation are different than Classic Skylight.

Key differences include:

- Headrail and Bottomrail are identical and are the same rail used with standard Motorized shades.



Bliss and SOMFY Automation:

- Fabric stacks to the top of the window – between the moving rail and headrail



SKYLIGHT with AUTOMATION - SIZE STANDARDS

	All Honeycomb Fabrics*
Minimum Width	18"
Maximum Width	48"
Minimum Height	12"
Maximum Height	72"

* Skylight with Automation not available with 1-1/4", 2" Hybrid Pleat, 3/4" Peaceful Allure Room Darkening or 3/4" Lanai, Coastal, Enchanting Allure Fabrics

FINISHED DIMENSIONS

Adjustments are taken from ordered dimensions.

Inside (IB) Mount

Headrail unit	- 3/16"
Shade height	ordered height
Fabric width	- 1-1/4"

HEADRAIL & BOTTOMRAIL DIMENSIONS

Depth of Rail	2"
Depth of Rail & Bracket	2-1/4"
Depth of Rail, Side Tracks & Bracket	2-1/2"
Height of Rail	1-1/2"

NOTE: Skylight with Automation is **not available** with 2" Hybrid Pleat, or 1-1/4" Fabrics

NOT AVAILABLE with PowerWand.

Features

- Inside Mount only
- White Tiara (661) aluminum head and bottom rails. White vinyl side rails
- Use radio frequency controlled Bliss Automation or Somfy motors
- Wireless remote control operates individual or groups of shades

Operation & Installation Tips

- Skylight with Bliss and Somfy Automation have the option of an external battery pack that can be installed on the back of the headrail. Consider adding 48" Extension Cable (Part #62207000) to the order for installation flexibility. The part may be daisy-chained for additional flexibility.
- Shades installed into windows with metal casings may have a reduced radio frequency range, or may not operate at all.
- Do not let the antenna on the motor touch any metal objects. This may interfere with signals from the remote control.
- Make sure to leave the top of the headrail open (motor exposed), do not cover; especially with metal materials. This could result in a reduced radio frequency range for the remote control or the shade may not operate at all.
- Motorized Skylights will NOT operate properly if installed in a completely horizontal application. The minimum recommended slope is 5%.

MOUNTING REQUIREMENTS

- Should not be more than 1/2" out of square to perform as intended
- The widest width of the window cannot exceed the narrowest width of the window by more than 3/8"
- The shade must be mounted with the fabric stack at the top or highest point in the window.

Bliss Automation

External Battery - Mounted away from the Headrail

Inside (IB) Mounts

Minimum mounting depth, IB	2-1/2"
----------------------------	--------

External Battery - Mounted to the back of the Headrail

Inside (IB) Mounts

Minimum mounting depth, IB	3-1/2"
----------------------------	--------

NOTE:

The dimensions of the external battery add an extra 1" to the mounting depth requirements if it is mounted to the back of the headrail.